


1. 斜齿轮—锥齿轮减速机（T系列）特点：
Helical-bevel geared motor(T series)features:

T系列减速机，结合国际技术要求制造，具有很高的科技含量，节省空间，可靠耐用，承受过载能力高，功率可达200KW，能耗低，性能优越，减速机效率高达95%以上，振动小，噪音低，节能高，选用优质锻钢材料，钢性铸铁箱体，齿轮表面经过渗碳硬化处理，经过精密加工，构成了斜齿轮、伞齿轮、锥齿轮传动总成的减速机配置各种类电机，形成机电一体化，完全保证了产品使用质量特性。


T series helical geared motor are completely new design and new concepts of manufactur.The whole series have higher science and technology contents,small volume,higher reliability,Power can be reached 200KW,Lower energy consume, superiority performance,the gear unit efficiency can up to 95%,the sturdy gear housings are manufactured of high grade cast-iron and dampen vibrations;inhale noise,Gears are made of high-grade alloy steel,pass carburization,quenching and finishing and the hardness of gear surface is reach to 58HRC~62HRC(The precision of gear surface can be reach to 6 stages).So can ensure long-lift of the gear unit.The gear unit can be equip with various motors with brake and without brake, Form the integrated of the electromechanics transmission device.

2. T系列 斜齿轮-锥齿轮减速机形式代号：
T series helical-bevel geared motor type designation:

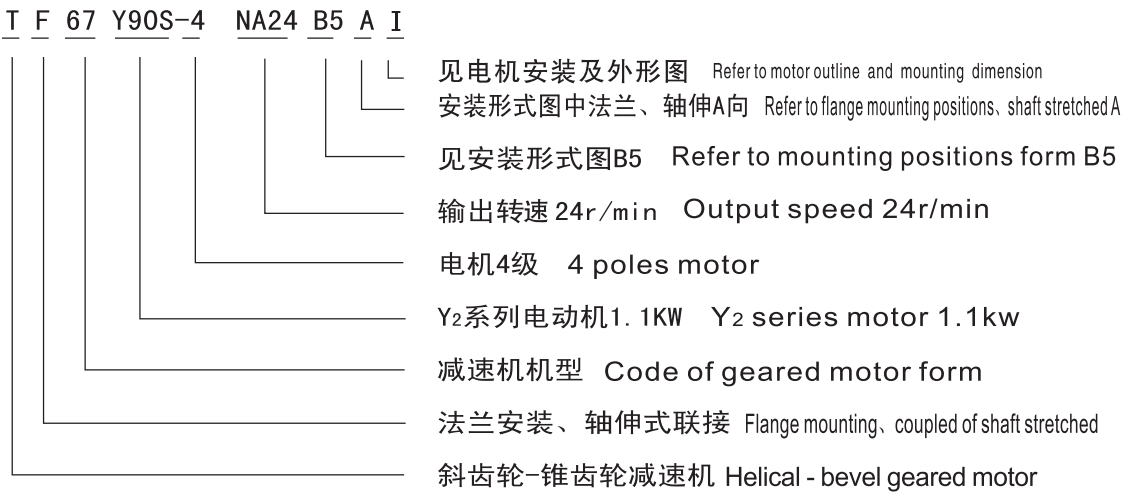

3. 联接代号及形式：
Coupled of code and form:

T-底脚安装、轴伸式联接 T Foot mounting、coupled of shaft stretched	TA-轴装式联接、底脚支承 TA Coupled of shaft mounting、foot supporting
TF-法兰安装、轴伸式联接 TF Flange mounting、coupled of shaft stretched	TAF-法兰安装、轴装式联接 TAF Flange mounting、coupled of shaft stretched
TA/T-反力矩安装、轴装式联接 TAT Torque-arm mounting coupled of shaft shaft mouting	TH-锁紧盘安装、轴装式联接 TH shrink disk mounting、coupled of shaft mounting

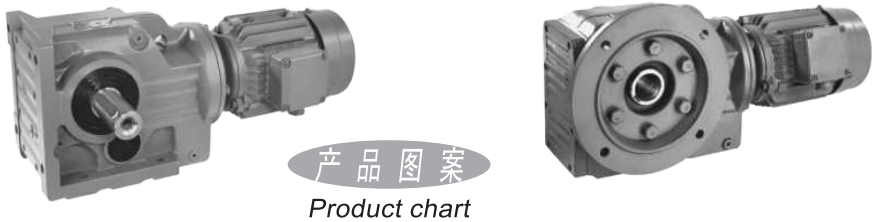

T系列减速机型号选择:

T series geared motor select type:

1. 选型时要首先确定使用系数 f_B ，可以通过下面的计算公式参照每天的工作时间总和：每小时的开/关次数；由重力加速度计算出的负载等级等几项参数计算 f_B 。

At first confirm service factor f_B when select type, through the calculate formula as below and refer to daily total operating period :times of startup/hour; Calculate f_B in such several parameters as the grade of load that is worked out by the acceleration of gravity ,etc.

2. 载荷分类：
- I. 均匀负载：允许惯性加速参数 ≤ 0.2
 - II. 中等冲击载荷：允许惯性加速参数 ≤ 3
 - III. 重冲击载荷：允许惯性加速参数 ≤ 10


$$\text{惯性加速参数} = \frac{\text{负载惯量}}{\text{驱动电机惯量}}$$

- Load classification:
- I. Uniform load: Permissible inertial accelerate parameter ≤ 0.2
 - II. Moderate shock load: Permissible inertial accelerate parameter ≤ 3
 - III. Heavy shock load: Permissible inertia accelerate parameter ≤ 10

$$\text{Inertia accelerate parameter} = \frac{\text{Load inertia}}{\text{Drive motor inertia}}$$


3. 例：负载等级I，启动次数200次/天，运行时间24小时/天， $f_B=1.35$ ，由图示所得出的使用系数应该与由速度/功率选型表所列出的使用系数相比较，为了确保使用寿命，选择的使用系数应该等于或略高于图示计算出的使用系数，表中所列最大扭矩以 $M_{max}f_B=1$ 为标准，输出扭矩和使用系数不能超过 M_{max} 。

Example: Load grade I, Number of startup 200 times per day. Operating period 24 hour per day, $f_B=1.35$. Refer to the chart as belows and educible service factor which the speed/power of election table listed service factor is compared. In order to insure service-life, select service factor sshould be equal to or hyper-work out service factor from the chart. The listed biggest torque is with $M_{max}f_B=1$ standard in the form, Output torque and service factor unable to exceed M_{max} .

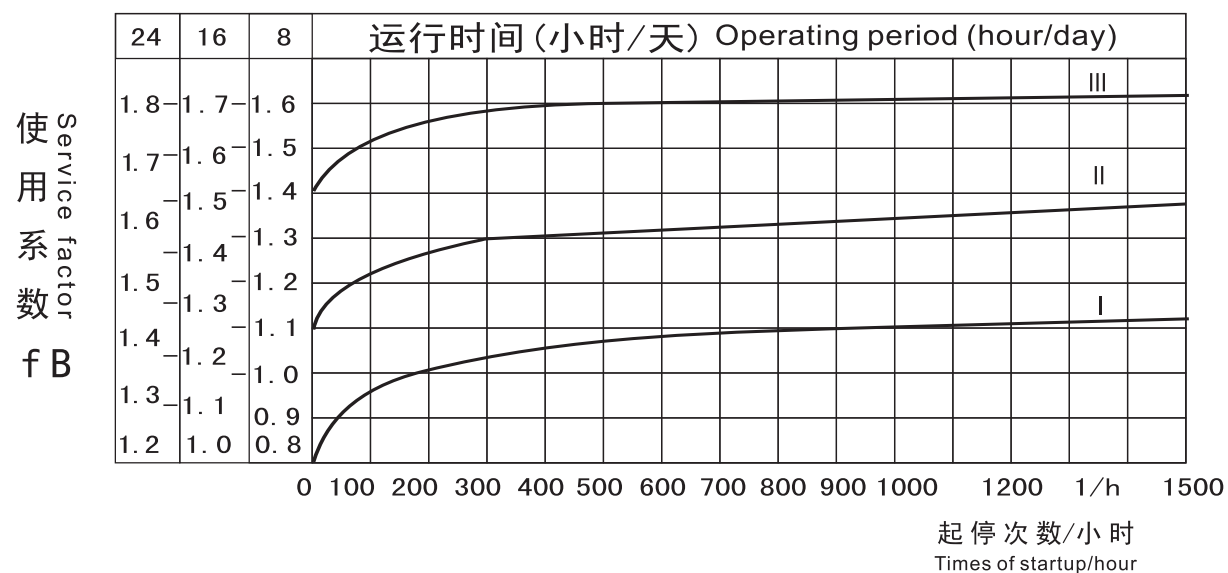


安装形式 Mounting position


TA37-107

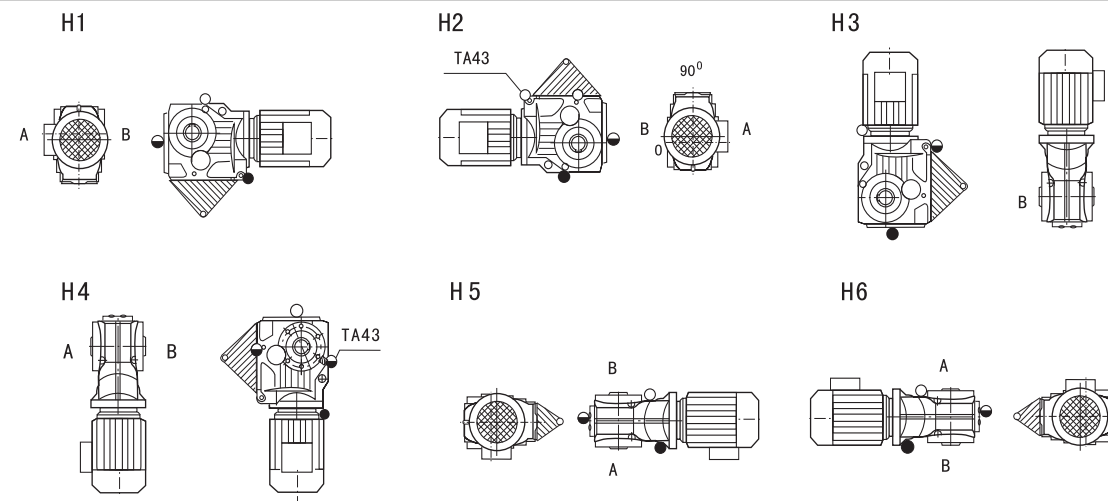

TA127-157

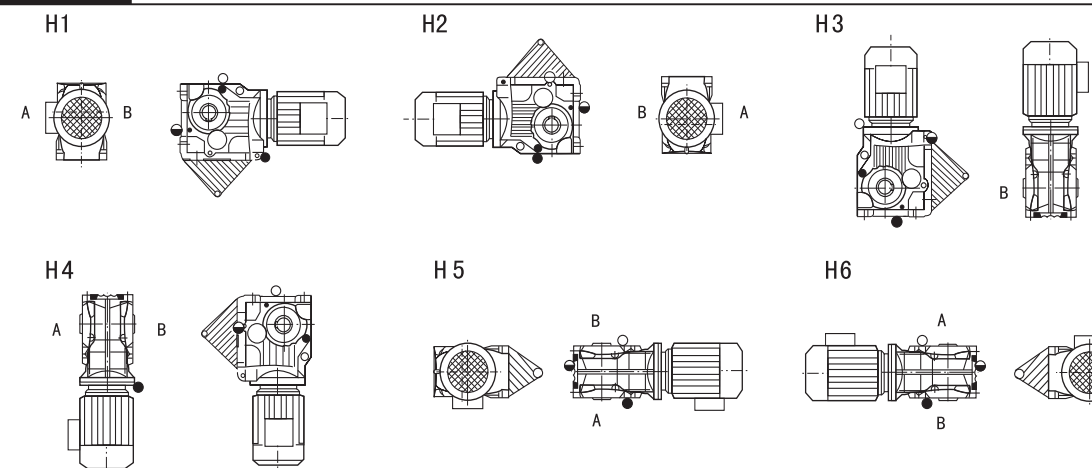

TF.TAF37-107

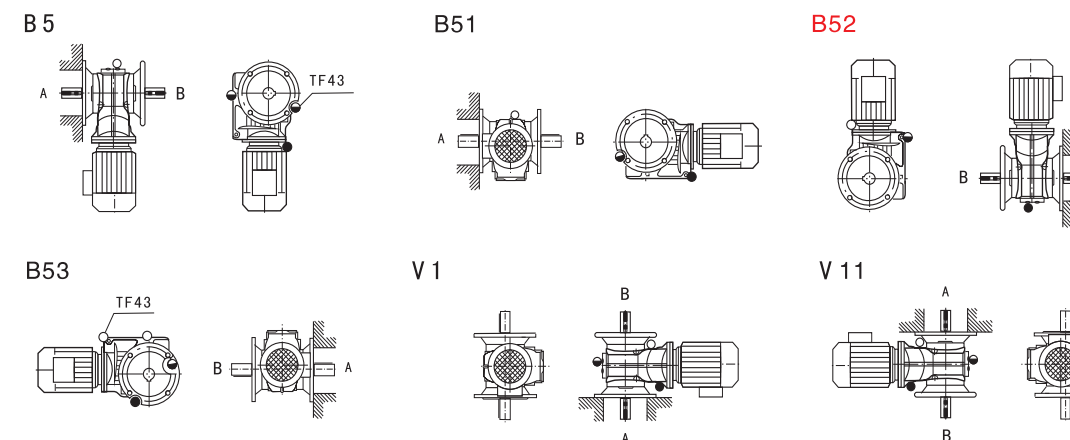


安装形式


Mounting position

TF.TAF 127-157


B5. B65




B51.B3/B51




B52.B62/B52




B53.B8/B53



V1.V15




V11.V6/V11




T37-157


B3




B31




B6




B61




B62




B8




B81




V5




V51



V6



V61



选型参数表
Select type parameter table

功率 P_m KW	输出转速 n_a r/min	速比 i	输出扭矩 M_a Nm	使用系数 f_B	型号	功率 P_m KW	输出转速 n_a r/min	速比 i	输出扭矩 M_a Nm	使用系数 f_B	型号
0.12	0.08	17550	11800	1.10		0.12	0.66	2088	1380	1.95	
	0.09	16006	10700	1.20			0.74	1854	1220	2.20	
	0.11	12440	8010	1.60	T 127D77Y631-4		0.83	1657	1090	2.25	
	0.13	10915	6920	1.90	TF 127D77Y631-4		0.97	1415	930	2.60	T 87D57Y631-4
	0.14	9819	6320	2.10	TA 127D77Y631-4		1.1	1229	800	3.10	TF 87D57Y631-4
	0.16	8443	5220	2.25	TAF127D77Y631-4		1.3	1078	695	3.50	TA 87D57Y631-4
	0.18	7482	4820	2.40			1.5	951	585	4.10	TAF87D57Y631-4
							1.6	837	505	4.90	
0.12	0.10	14311	8630	0.85		0.12	0.51	2717	1610	0.85	
	0.11	12211	8060	1.00			0.58	2370	1510	1.05	
	0.13	10677	6930	1.15			0.67	2050	1380	1.10	
	0.14	9524	6280	1.25	T 107D77Y631-4		0.78	1772	1180	1.30	T 77D37Y631-4
	0.17	8328	5410	1.50	TF 107D77Y631-4		0.91	1514	1010	1.55	TF 77D37Y631-4
	0.19	7270	4720	1.70	TA 107D77Y631-4		0.99	1388	920	1.70	TA 77D37Y631-4
	0.22	6184	3760	2.10	TAF107D77Y631-4		1.1	1218	810	1.90	TAF77D37Y631-4
	0.24	5662	3320	2.40			1.3	1053	710	2.20	
0.12	0.27	5138	3020	2.40		0.12	1.5	924	620	2.25	
	0.32	4359	2700	2.70			1.7	815	550	2.50	
							2.0	709	440	3.20	
							2.2	622	385	3.60	
	0.17	8054	4780	0.80		0.12	1.0	1351	840	0.90	
	0.20	6970	4350	1.00			1.2	1171	795	1.05	
	0.23	6027	3890	1.10			1.3	1034	695	1.20	
	0.26	5391	3560	1.20			1.5	903	585	1.40	
	0.30	4669	2950	1.45			1.7	793	545	1.50	
	0.34	4082	2640	1.65			2.0	697	440	1.85	T 67D37Y631-4
	0.39	3583	2320	1.85	T 97D57Y631-4		2.2	613	390	2.10	TF 67D37Y631-4
	0.44	3108	2040	2.10	TF 97D57Y631-4		2.5	542	340	2.40	TA 67D37Y631-4
0.12	0.50	2757	1720	2.25	TA 97D57Y631-4		2.9	471	315	2.30	TAF67D37Y631-4
	0.57	2419	1580	2.40	TAF 97D57Y631-4	0.12	3.3	420	265	2.90	
	0.65	2123	1370	2.90			3.8	361	235	3.20	
	0.74	1856	1220	3.20			4.3	323	210	3.50	
	0.85	1625	1000	3.90			4.9	279	176	4.20	
	0.96	1430	860	4.50			5.6	246	155	4.80	
	1.1	1261	830	4.70			6.3	217	134	5.50	
	1.2	1102	725	5.30							
0.12	0.26	5240	3040	0.80		0.12	1.5	906	585	1.05	T 57D37Y631-4
	0.30	4562	2565	0.95			1.7	806	525	1.15	TF 57D37Y631-4
	0.34	4037	2610	1.05	T 87D57Y631-4		2.0	699	445	1.35	TA 57D37Y631-4
	0.38	3609	2330	1.15	TF 87D57Y631-4		2.2	615	390	1.55	TAF57D37Y631-4
	0.44	3107	1990	1.35	TA 87D57Y631-4						
	0.51	2728	1700	1.60	TAF 87D57Y631-4						
	0.58	2371	1500	1.80							

选型参数表

Select type parameter table

功率	输出转速	速比	输出扭矩	使用系数	型号	功率	输出转速	速比	输出扭矩	使用系数	型号
P _m	n _a	i	M _a			P _m	n _a	i	M _a		
KW	r/min		Nm	fB		KW	r/min		Nm	fB	
0.12	2.5	544	340	1.75		0.12	36	38.5	32	5.70	
	2.9	473	310	1.95			39	35.2	30	6.10	
	3.3	421	265	2.30			46	29.3	25	7.20	
	3.8	362	235	2.25	T 57D37Y631-4		48	28.0	24	7.60	T 37Y631-4
	4.3	319	210	2.60	TF 57D37Y631-4		55	25.0	21	8.60	TF 37Y631-4
	4.9	280	176	3.10	TA 57D37Y631-4		59	22.5	19	9.00	TA 37Y631-4
	5.6	246	155	3.50	TAF57D37Y631-4		68	19.7	17	10.0	TAF37Y631-4
	6.4	215	135	4.00			80	16.6	14	12.0	
	7.2	192	122	4.40			90	15.6	13	13.0	
0.12	2.2	639	390	0.95			105	13.8	11	14.0	
	2.5	552	370	1.10			114	12.3	10	15.0	
	2.8	495	315	1.25	T 47D37Y631-4	0.18	0.09	14975	14670	0.80	
	3.2	426	280	1.45	TF 47D37Y631-4		0.11	12440	12060	0.95	
	3.7	375	235	1.70	TA 47D37Y631-4		0.12	10915	11600	1.10	
	4.2	327	215	1.85	TAF47D37Y631-4		0.13	9819	10500	1.25	
	4.8	289	189	2.10			0.16	8443	8850	1.45	T 127D77Y632-4
0.12	4.0	346	210	0.85			0.18	7482	8040	1.60	TF 127D77Y632-4
	4.5	304	200	1.00			0.20	6565	6990	1.85	TA 127D77Y632-4
	5.2	267	182	1.10	T 37D17Y631-4		0.23	5804	5940	2.20	TAF127D77Y632-4
	5.9	234	157	1.25	TF 37D17Y631-4		0.26	5027	5220	2.25	
	6.7	205	138	1.45	TA 37D17Y631-4		0.30	4423	4530	2.60	
	7.6	181	120	1.65	TAF37D17Y631-4		0.34	3889	3960	3.00	
	8.6	160	105	1.90			0.40	3311	3310	3.50	
	10	136	88	2.30		0.18	0.16	8328	8090	0.90	
0.12	9.5	142	121	4.50	T 57Y631-4		0.18	7270	7850	1.00	
	11	132	103	5.20	TF 57Y631-4		0.21	6184	6420	1.25	
	13	105	90	6.00	TA 57Y631-4		0.23	5662	5760	1.40	T 107D77Y632-4
	15	91.3	75	7.20	TAF57Y631-4		0.26	5138	5230	1.55	TF 107D77Y632-4
0.12	10	133	110	3.30	T 47Y631-4		0.30	4359	4570	1.75	TA 107D77Y632-4
	11	121	101	3.60	TF 47Y631-4 TA 47Y631-4 TAF47Y631-4		0.35	3810	4000	2.00	TAF107D77Y632-4
0.12	13	110	88	2.30			0.39	3358	3440	2.30	
	14	94.1	81	2.25			0.44	2977	3090	2.30	
	16	81.6	70	2.60	T 37Y631-4		0.51	2599	2700	2.70	
	19	71.4	60	3.00	TF 37Y631-4		0.58	2286	2340	3.10	
	20	67.0	56	3.20	TA 37Y631-4	0.18	0.28	4669	4500	0.85	T 97D57Y632-4
	24	59.4	49	3.70	TAF37Y631-4						TF 97D57Y632-4
	28	52.9	41	4.30							TA 97D57Y632-4
	31	45.6	37	4.90							TAF 97D57Y632-4

选型参数表

Select type parameter table

功率	输出转速	速比	输出扭矩	使用系数	型号	功率	输出转速	速比	输出扭矩	使用系数	型号
P _m	n _a	i	M _a			P _m	n _a	i	M _a		
KW	r/min		Nm	fB		KW	r/min		Nm	fB	
0.18	0.32	4082	4390	1.00		0.18	1.5	903	880	0.85	
	0.37	3583	3860	1.10			1.7	793	800	0.90	
	0.42	3108	3370	1.25			1.9	697	745	1.10	
	0.48	2757	2910	1.50			2.2	613	655	1.25	T 67D37Y632-4
	0.55	2419	2640	1.65	T 97D57Y632-4		2.4	542	580	1.40	TF 67D37Y632-4
	0.62	2123	2290	1.90	TF 97D57Y632-4		2.8	471	520	1.60	TA 67D37Y632-4
	0.71	1856	2030	2.10	TA 97D57Y632-4		3.2	420	445	1.85	TAF67D37Y632-4
	0.81	1625	1710	2.25	TAF 97D57Y632-4		3.7	361	395	2.10	
	0.92	1430	1490	2.60			4.1	323	350	2.30	
	1.0	1261	1380	2.80			4.7	279	295	2.50	
	1.2	1102	1210	3.20		0.18	2.2	615	600	0.90	
	1.4	957	1040	3.70			2.4	544	580	1.05	
0.18	1.5	855	930	4.10			2.8	473	515	1.15	
	1.8	743	755	5.20			3.1	421	450	1.35	
	2.0	652	675	5.80			3.6	362	395	1.50	T 57D37Y632-4
	0.42	3107	3000	0.80			4.1	319	350	1.75	TF 57D37Y632-4
	0.48	2728	2600	0.95			4.7	280	300	2.00	TA 57D37Y632-4
	0.56	2371	2520	1.05			5.4	246	260	2.30	TAF57D37Y632-4
	0.63	2088	2290	1.20			6.1	215	230	2.30	
	0.71	1854	2030	1.35	T 87D57Y632-4		6.9	192	205	2.60	
	0.80	1657	1820	1.50	TF 87D57Y632-4		7.9	166	178	3.10	
	0.93	1415	1540	1.75	TA 87D57Y632-4	0.18	3.5	375	400	1.00	
	1.1	1229	1340	2.00	TAF 87D57Y632-4		4.0	327	360	1.10	
	1.2	1078	1160	2.30			4.6	289	315	1.25	
	1.4	951	1000	2.40			5.2	256	275	1.45	T 47D37Y632-4
	1.6	837	870	2.80			5.9	225	245	1.65	TF 47D37Y632-4
	1.8	726	755	3.30			6.7	198	210	1.90	TA 47D37Y632-4
0.18	0.87	1514	1560	0.95			7.7	171	183	2.20	TAF47D37Y632-4
	0.95	1388	1530	1.00			8.6	153	164	2.40	
	1.1	1218	1340	1.15			10	131	142	2.50	
	1.2	1053	1170	1.35	T 77D37Y632-4	0.18	6.4	205	200	0.90	T 37D17Y632-4
	1.4	924	1030	1.50	TF 77D37Y632-4		7.3	181	199	1.00	TF 37D17Y632-4
	1.6	815	910	1.70	TA 77D37Y632-4		8.2	160	175	1.15	TA 37D17Y632-4
	1.9	709	750	2.10	TAF 77D37Y632-4		9.7	136	148	1.35	TAF37D17Y632-4
	2.1	622	655	2.40			10	127	140	1.45	
	2.4	552	590	2.30		0.18	6.0	147	285	2.50	T 67Y711-6
	2.7	485	515	2.70							TF 67Y711-6
	3.1	428	455	3.10							TA 67Y711-6
	3.6	367	400	3.50							TAF 67Y711-6

选型参数表

Select type parameter table

功率	输出转速	速比	输出扭矩	使用系数	型号	功率	输出转速	速比	输出扭矩	使用系数	型号		
P _m	n _a	i	M _a			P _m	n _a	i	M _a				
KW	r/min		Nm	fB		KW	r/min		Nm	fB			
0.18	7.0	121	245	3.00	T	67Y711-6	0.18	77	16.6	22	7.30		
	8.1	109	215	3.40	TF	67Y711-6		86	15.6	20	7.90	T	37Y632-4
	8.5	101	205	3.50	TA	67Y711-6		101	13.8	17	8.70	TF	37Y632-4
					TAF	67Y711-6		109	12.3	16	9.00	TA	37Y632-4
0.18	9.1	147	189	3.80	T	67Y632-4		126	10.6	14	11.0	TAF	37Y632-4
	11	121	161	4.50	TF	67Y632-4		148	9.32	12	13.0		
	12	109	141	5.10	TA	67Y632-4	166	8.20	10	14.0			
0.18	6.0	142	285	2.10			0.25	0.13	9819	13770	0.85		
	7.0	132	245	2.25	T	57Y711-6		0.15	8443	13000	1.00		
	8.0	105	215	2.50	TF	57Y711-6		0.17	7482	11700	1.10		
	8.5	97.8	205	2.70	TA	57Y711-6		0.20	6565	10200	1.30	T	127D77Y711-4
	9.6	91.3	178	3.10	TAF	57Y711-6		0.22	5804	8770	1.50	TF	127D77Y711-4
0.18	9.1	142	189	2.90				0.26	5027	7670	1.70	TA	127D77Y711-4
	11	132	161	3.40	T	57Y632-4		0.29	4423	6680	1.95	TAF	127D77Y711-4
	12	105	141	4.00	TF	57Y632-4		0.33	3889	5850	2.20		
	13	97.8	134	4.10	TA	57Y632-4		0.39	3311	4930	2.30		
	15	91.3	118	4.60	TAF	57Y632-4		0.25	0.21	6184	8500	0.85	
17	80.1	100	5.40			0.23	5662		7700	0.95			
0.18	6.6	133	260	1.55	T	47Y711-6	0.25		5138	7730	1.05		
	7.2	121	240	1.65	TF	47Y711-6	0.30		4359	6700	1.20		
	8.3	102	205	1.95	TA	47Y711-6	0.34		3810	5850	1.35		
	9.6	94.3	180	2.20	TAF	47Y711-6	0.39		3358	5070	1.60	T	107D77Y711-4
0.18	10	133	172	2.30	T	47Y632-4	0.44		2977	4540	1.75	TF	107D77Y711-4
	11	121	158	2.50	TF	47Y632-4	0.50		2599	3970	2.00	TA	107D77Y711-4
	13	102	136	2.60	TA	47Y632-4	0.57		2286	3450	2.30	TAF	107D77Y711-4
	15	94.3	118	3.10	TAF	47Y632-4	0.67		1939	2930	2.40		
	16	87.6	111	3.20			0.76		1713	2640	2.70		
0.18	8.2	110	190	0.95	T	37Y711-6	0.84		1554	2390	3.00		
	8.9	94.1	193	1.05	TF	37Y711-6	0.97		1336	2060	3.50		
	10	81.6	165	1.20	TA	37Y711-6	0.25		0.42	3108	4400	0.90	T
	12	71.4	143	1.40	TAF	37Y711-6		0.47	2757	4250	1.00	TF	97D77Y711-4
0.18	12	110	139	1.45							TA	97D77Y711-4	
	14	94.1	127	1.55						TAF	97D77Y711-4		
	16	81.6	109	1.85		0.25	0.54	2419	3840	1.10			
	18	71.4	95	2.10			0.61	2123	3340	1.30			
	19	67.0	88	2.30			0.70	1856	2950	1.45			
	23	59.4	76	2.30	T		37Y632-4	0.80	1625	2520	1.70	T	97D57Y711-4
	27	52.9	65	2.80	TF		37Y632-4	0.91	1430	2190	1.95	TF	97D57Y711-4
	30	45.6	58	3.20	TA		37Y632-4	1.0	1261	2010	2.10	TA	97D57Y711-4
	35	38.5	49	3.70	TAF		37Y632-4	1.2	1102	1750	2.25	TAF	97D57Y711-4
	37	35.2	46	3.90			1.4	957	1520	2.50			
	44	29.3	39	4.60			1.5	855	1360	2.90			
	46	28.0	38	4.80		0.25	0.62	2088	3000	0.80	T	87D57Y711-4	
	53	25.0	33	5.60			0.70	1854	2700	0.90	TF	87D57Y711-4	
	57	22.5	30	5.80			0.78	1657	2640	1.00	TA	87D57Y711-4	
	65	19.7	26	6.30			0.92	1415	2250	1.20	TAF	87D57Y711-4	

选型参数表

Select type parameter table

功率	输出转速	速比	输出扭矩	使用系数	型号	功率	输出转速	速比	输出扭矩	使用系数	型号
P _m	n _a	i	M _a			P _m	n _a	i	M _a		
KW	r/min		Nm	fB		KW	r/min		Nm	fB	
0.25	1.1	1229	1950	1.40		0.25	9.0	147	265	2.80	T 67 Y711-4
	1.2	1078	1700	1.60	T 87D57Y711-4		11	121	225	3.30	TF 67 Y711-4
	1.4	951	1470	1.85	TF 87D57Y711-4		12	109	198	3.60	TA 67 Y711-4
	1.5	837	1280	2.10	TA 87D57Y711-4		13	101	189	3.80	TAF67Y711-4
	1.8	726	1110	2.35	TAF87D57Y711-4	0.25	9.0	142	265	2.20	
	2.0	638	990	2.40			11	132	225	2.30	T 57 Y711-4
0.25	1.2	1053	1600	0.90			12	105	199	2.70	TF 57 Y711-4
	1.4	924	1480	1.05			13	97.8	189	2.90	TA 57 Y711-4
	1.6	815	1310	1.20			14	91.3	166	3.30	TAF57Y711-4
	1.8	709	1100	1.40			17	80.1	141	3.80	
	2.1	622	960	1.60		0.25	6.7	133	360	1.10	T 47 Y712-6
	2.3	552	860	1.80			7.2	121	330	1.20	TF 47 Y712-6
	2.7	485	755	2.00	T 77D37Y711-4		8.4	102	285	1.40	TA 47 Y712-6
	3.0	428	665	2.30	TF 77D37Y711-4		9.7	94.3	245	1.60	TAF47Y712-6
	3.5	367	580	2.40	TA 77D37Y711-4		10	87.6	230	1.75	
	4.0	328	515	2.70	TAF77D37Y711-4	0.25	9.9	133	240	1.65	T 47 Y711-4
	4.5	290	460	3.10			11	121	225	1.80	TF 47 Y711-4
	5.2	252	395	3.50			12	102	192	2.10	TA 47 Y711-4
	5.9	221	345	4.00			14	94.3	167	2.40	TAF47Y711-4
	6.7	195	305	4.60			15	87.6	156	2.30	
0.25	7.4	175	270	5.20		0.25	12	110	195	1.00	
	2.1	613	870	0.85			13	94.1	180	1.10	
	2.4	542	770	0.95			16	81.6	154	1.30	
	2.8	471	755	1.10			18	71.4	133	1.50	
	3.1	420	655	1.25	T 67D37Y711-4		19	67.0	125	1.60	
	3.6	361	575	1.45	TF 67D37Y711-4		22	59.4	108	1.85	
	4.0	323	510	1.60	TA 67D37Y711-4		26	52.9	91	2.20	
	4.7	279	435	1.90	TAF67D37Y711-4		29	45.6	82	2.25	
	5.3	246	385	2.10			34	38.5	70	2.60	
	6.0	217	335	2.40			37	35.2	65	2.80	T 37 Y711-4
0.25	3.1	421	600	0.90			43	29.3	55	3.30	TF 37 Y711-4
	3.6	362	575	1.05			45	28.0	53	3.40	TA 37 Y711-4
	4.1	319	505	1.20			52	25.0	46	4.00	TAF 37 Y711-4
	4.7	280	435	1.35			56	22.5	43	4.10	
	5.3	246	385	1.55			64	19.7	37	4.50	
	6.1	215	335	1.80	T 57D37Y711-4		76	16.6	32	5.10	
	6.8	192	300	2.00	TF 57D37Y711-4		85	15.6	28	5.60	
	7.8	166	260	2.30	TA 57D37Y711-4		99	13.8	24	6.20	
	9.0	145	225	2.40	TAF57D37Y711-4		107	12.3	22	6.50	
	10	129	205	2.60			124	10.6	19	7.50	
	12	111	173	3.20			146	9.32	16	8.80	
	13	97.0	152	3.60			163	8.20	15	10.0	
0.25	6.1	147	395	2.10	T 67 Y712-6		191	7.23	13	11.0	
	7.1	121	335	2.25	TF 67 Y712-6		204	6.39	12	11.5	
	8.1	109	295	2.50	TA 67 Y712-6						
	8.6	101	280	2.70	TAF67Y712-6						

选型参数表

Select type parameter table

功率	输出转速	速比	输出扭矩	使用系数	型号	功率	输出转速	速比	输出扭矩	使用系数	型号
P _m	n _a	i	M _a			P _m	n _a	i	M _a		
KW	r/min		Nm	fB		KW	r/min		Nm	fB	
0.37	0.18	7482	15000	0.80		0.37	1.7	815	1700	0.85	
	0.21	6565	13100	0.90			2.0	709	1580	1.00	
	0.24	5804	12600	1.05	T 127D77Y712-4		2.2	622	1380	1.10	
	0.27	5027	11000	1.20	TF 127D77Y712-4		2.5	552	1230	1.25	
	0.31	4423	9610	1.35	TA 127D77Y712-4		2.8	485	1080	1.45	
	0.35	3889	8430	1.55	TAF127D77Y712-4		3.2	428	950	1.60	T 77D37Y712-4
	0.42	3311	7120	1.85			3.8	367	830	1.85	TF 77D37Y712-4
	0.72	1926	4230	2.80			4.2	328	735	2.10	TA 77D37Y712-4
	0.79	1757	3860	3.10			4.8	290	655	2.40	TAF77D37Y712-4
	0.90	1541	3360	3.50			5.5	252	565	2.50	
0.37	0.36	3810	7600	0.95		0.37	6.2	221	495	2.80	
	0.41	3358	7300	1.10			7.1	195	435	3.20	
	0.46	2977	6510	1.25	T 107D77Y712-4		7.9	175	390	3.60	
	0.53	2599	5690	1.40	TF 107D77Y712-4		9.0	154	340	4.00	
	0.60	2286	4970	1.60	TA 107D77Y712-4	0.37	3.3	420	850	0.90	
	0.71	1939	4210	1.90	TAF107D77Y712-4		3.8	361	820	1.00	
	0.81	1713	3790	2.10			4.3	323	725	1.15	
	0.89	1554	3440	2.30			4.9	279	625	1.30	T 67D37Y712-4
	1.0	1336	2950	2.40			5.6	246	550	1.50	TF 67D37Y712-4
	1.2	1166	2580	2.80			6.3	217	485	1.70	TA 67D37Y712-4
0.37	0.65	2123	4300	0.90			7.2	191	430	1.90	TAF67D37Y712-4
	0.74	1856	4200	1.00			8.3	166	370	2.20	
	0.85	1625	3610	1.20			9.6	144	320	2.25	
	0.96	1430	3160	1.35			11	122	275	2.70	
	1.1	1261	2850	1.50	T 97D57Y712-4	0.37	4.9	280	570	0.95	T 57D37Y712-4
	1.2	1102	2490	1.70	TF 97D57Y712-4		5.6	246	550	1.10	TF 57D37Y712-4
	1.4	957	2160	2.00	TA 97D57Y712-4		6.4	215	480	1.25	TA 57D37Y712-4
	1.6	855	1930	2.20	TAF97D57Y712-4		7.2	192	430	1.40	TAF57D37Y712-4
	1.9	743	1620	2.40			8.3	166	370	1.60	
	2.1	652	1430	2.70			4.6	209	775	3.20	T 87Y801-6
	2.4	573	1280	3.10			5.2	179	685	3.60	TF 87Y801-6
										TA 87Y801-6	
										TAF87Y801-6	
						0.37	7.2	192	490	2.70	T 77Y712-4
0.37	0.97	1415	2900	0.85			8.8	158	460	2.90	TF 77Y712-4
	1.1	1229	2500	0.95			9.0	149	395	3.60	TA 77Y712-4
	1.3	1078	2420	1.10						TAF77Y712-4	
	1.5	951	2110	1.30		0.37	9.5	147	370	2.20	T 67Y712-4
	1.6	837	1850	1.45	T 87D57Y712-4		11	121	315	2.30	TF 67Y712-4
	1.9	726	1600	1.70	TF 87D57Y712-4		13	109	275	2.60	TA 67Y712-4
	2.2	638	1420	1.90	TA 87D57Y712-4		15	94.6	230	3.30	TAF67Y712-4
	2.5	562	1240	2.20	TAF87D57Y712-4		18	73.5	196	3.70	
	2.9	474	1040	2.30		0.37	7.3	132	485	1.25	T 57Y801-6
	3.2	426	940	2.60			8.3	105	425	1.40	TF 57Y801-6
	3.7	373	810	3.00			8.8	97.8	405	1.50	TA 57Y801-6
										TAF57Y801-6	

选型参数表

Select type parameter table

功率	输出转速	速比	输出扭矩	使用系数	型号	功率	输出转速	速比	输出扭矩	使用系数	型号
P _m	n _a	i	M _a			P _m	n _a	i	M _a		
KW	r/min		Nm	fB		KW	r/min		Nm	fB	
0.37	9.5	142	370	1.60		0.55	0.19	7343	23900	2.10	T 187D97Y801-4
	11	132	315	1.90	T 57Y712-4						TH 187D97Y801-4
	13	105	275	2.20	TF 57Y712-4	0.55	0.12	11573	34560	0.85	
	15	91.3	230	2.30	TA 57Y712-4		0.13	10264	30420	0.95	
	18	80.1	196	2.80	TAF57Y712-4		0.16	8628	28100	1.15	T 167D97Y801-4
	20	71.9	177	3.10			0.21	6562	21400	1.50	TH 167D97Y801-4
0.37	10	133	340	1.20			0.25	5355	17200	1.85	
	11	121	310	1.30			0.33	4079	13200	2.40	
	13	102	265	1.50	T 47Y712-4	0.55	0.20	6881	20160	0.80	T 157D97Y801-4
	15	94.3	235	1.70	TF 47Y712-4		0.23	5931	17370	0.95	TF 157D97Y801-4
	16	87.6	220	1.85	TA 47Y712-4		0.34	3979	13000	1.40	TA 157D97Y801-4
	18	76.2	193	2.10	TAF47Y712-4		0.45	3051	9940	1.80	TAF157D97Y801-4
	20	67.0	179	2.20		0.55	0.31	4423	13410	0.85	
	22	60.7	162	2.30			0.35	3889	13000	1.00	
0.37	14	94.1	230	0.80			0.41	3311	11100	1.20	
	16	81.6	200	0.95			0.45	3009	10000	1.30	T 127D77Y801-4
	19	71.4	186	1.10			0.52	2607	8630	1.50	TF 127D77Y801-4
	20	67.0	174	1.15			0.71	1926	6560	2.00	TA 127D77Y801-4
	24	59.4	150	1.35			0.77	1757	5980	2.20	TAF127D77Y801-4
	28	52.9	128	1.55			0.88	1541	5220	2.25	
	31	45.6	114	1.75			1.0	1342	4570	2.50	
	36	38.5	97	2.10			1.2	1177	3990	3.00	
	39	35.2	91	2.20			1.3	1025	3490	3.30	
	46	29.3	77	2.30	T 37Y712-4	0.55	0.46	2977	9100	0.80	
0.55	48	28.0	74	2.40	TF 37Y712-4		0.52	2599	7900	0.90	
	55	25.0	64	2.80	TA 37Y712-4		0.59	2286	7690	1.05	
	59	22.5	60	3.00	TAF37Y712-4		0.70	1939	6520	1.25	
	68	19.7	52	3.30			0.79	1713	5850	1.35	T 107D77Y801-4
	80	16.6	44	3.70			0.87	1554	5310	1.50	TF 107D77Y801-4
	90	15.6	39	4.10			1.0	1336	4570	1.75	TA 107D77Y801-4
	105	13.8	34	4.40			1.2	1166	3990	2.00	TAF107D77Y801-4
	114	12.3	31	4.60			1.3	1030	3450	2.30	
	132	10.6	27	5.30			1.5	904	3000	2.40	
	155	9.32	23	6.30		0.55	1.7	793	2700	2.70	
0.55	173	8.20	20	6.90			2.0	696	2360	3.10	
	203	7.23	17	7.80			2.2	615	2050	3.50	
	217	6.39	16	8.00							
	233	6.00	14	9.00							
	0.08	16978	50310	0.90	T 187D97Y801-4						
	0.10	14272	46500	1.10	TH 187D97Y801-4						
	0.12	11647	37400	1.35							

选型参数表

Select type parameter table

功率	输出转速	速比	输出扭矩	使用系数	型号	功率	输出转速	速比	输出扭矩	使用系数	型号				
P _m	n _a	i	M _a			P _m	n _a	i	M _a						
KW	r/min		Nm	fB		KW	r/min		Nm	fB					
0.55	0.95	1430	4400	0.90		0.55	11	122	420	1.95	T 67D37Y801-4				
	1.1	1261	4380	1.00	TF 67D37Y801-4										
	1.2	1102	3820	1.15	TA 67D37Y801-4										
	1.4	957	3320	1.30	TAF67D37Y801-4										
	1.6	855	2960	1.45	TF 97D57Y801-4	0.55	7.1	192	600	0.90	T 57D37Y801-4				
	1.8	743	2520	1.70	TA 97D57Y801-4						8.2	166	575	1.05	TF 57D37Y801-4
	2.1	652	2220	1.95	TAF97D57Y801-4						9.4	145	495	1.20	TA 57D37Y801-4
	2.4	573	1970	2.20	TAF57D37Y801-4										
	2.7	504	1700	2.25		0.55	8.8	149	595	2.30					
	3.1	437	1470	2.60							10	140	520	2.70	T 77Y801-4
	3.6	382	1300	3.00							11	120	495	2.80	TF 77Y801-4
	4.5	305	1040	3.70							12	107	440	3.20	TA 77Y801-4
					14						101	375	3.70	TAF77Y801-4	
0.55	1.4	951	2930	0.85		0.55	11	121	475	1.70	T 67Y801-4				
	1.6	837	2580	0.95							13	109	415	1.95	TF 67Y801-4
	1.9	726	2480	1.10							15	94.6	350	2.40	TA 67Y801-4
	2.1	638	2190	1.25							18	73.5	295	2.50	TAF67Y801-4
	2.4	562	1920	1.40	T 87D57Y801-4						0.55	11	132	480	1.25
	2.9	474	1620	1.65	TF 87D57Y801-4	13	105	395	1.50	T 57Y801-4					
	3.2	426	1450	1.85	TA 87D57Y801-4	15	91.3	350	1.70	TF 57Y801-4					
	3.7	373	1260	2.10	TAF87D57Y801-4	18	80.1	295	2.00	TA 57Y801-4					
	4.1	330	1110	2.40		20	71.9	265	2.20	TAF57Y801-4					
	4.6	294	990	2.40		22	63.2	235	2.30						
	5.4	250	850	2.90		24	56.6	220	2.40						
	5.8	236	800	3.10		0.55	13	102	405	1.00					
6.8	201	680	3.60		15										
					16						87.6	330	1.20	T 47Y801-4	
2.5	552	1750	0.80		18						76.2	290	1.40	TF 47Y801-4	
2.8	485	1500	0.95		19						67.0	270	1.50	TA 47Y801-4	
3.2	428	1470	1.05		21						60.7	245	1.65	TAF47Y801-4	
3.7	367	1270	1.20		24						59.3	220	1.80		
4.2	328	1130	1.35	T 77D37Y801-4	28						48.2	189	2.10		
4.7	290	1000	1.55	TF 77D37Y801-4	30						47.7	178	2.20		
5.4	252	870	1.80	TA 77D37Y801-4	0.55	23	59.4	200	0.90						
6.2	221	760	2.00	TAF77D37Y801-4						27	52.9	192	1.05	T 37Y801-4	
7.0	195	670	2.30							31	45.6	172	1.15	TF 37Y801-4	
7.8	175	600	2.30							36	38.5	147	1.35	TA 37Y801-4	
8.8	154	530	2.60							38	35.2	137	1.45	TAF37Y801-4	
0.55	4.9	279	870	0.85							45	29.3	116	1.75	
	5.5	246	760	0.95						T 67D37Y801-4	47	28.0	111	1.80	
	6.2	217	745	1.10						TF 67D37Y801-4					
	7.1	191	660	1.25						TA 67D37Y801-4					
	8.2	166	570	1.45	TAF67D37Y801-4										
	9.4	144	495	1.65											

选型参数表

Select type parameter table

功率	输出转速	速比	输出扭矩	使用系数	型号	功率	输出转数	速比	输出扭矩	使用系数	型号
P _m	n _a	i	M _a			P _m	n _a	i	M _a		
KW	r/min		Nm	fB		KW	r/min		Nm	fB	
0.55	54	25.0	97	2.10		0.75	1.2	1166	5420	1.50	
	58	22.5	90	2.20			1.3	1030	4710	1.70	T 107D77Y802-4
	67	19.7	78	2.40	T 37Y801-4		1.5	904	4120	1.95	TF 107D77Y802-4
	79	16.6	66	2.40	TF 37Y801-4		1.7	793	3680	2.20	TA 107D77Y802-4
	89	15.6	59	2.70	TA 37Y801-4		2.0	696	3210	2.50	TAF107D77Y802-4
	104	13.8	51	3.00	TAF37Y801-4		2.2	615	2800	2.50	
	112	12.3	47	3.10							
0.55	130	10.6	41	3.60		0.75	1.2	1102	4700	0.85	
	153	9.32	34	4.30	T 37Y801-4		1.4	957	4050	0.95	
	171	8.20	31	4.60	TF 37Y801-4		1.6	855	4020	1.05	
	200	7.23	26	5.20	TA 37Y801-4		1.9	743	3430	1.25	T 97D57Y802-4
	214	6.39	25	5.30	TAF37Y801-4		2.1	652	3020	1.40	TF 97D57Y802-4
	233	6.00	21	6.20			2.4	573	2680	1.60	TA 97D57Y802-4
0.75	0.11	13116	52560	0.85			2.7	504	2320	1.85	TAF97D57Y802-4
	0.12	11647	46350	0.95			3.2	437	2010	2.10	
	0.19	7343	32800	1.50	T 187D97Y802-4		3.6	382	1770	2.40	
	0.20	6747	30000	1.65	TH 187D97Y802-4		4.5	305	1420	2.70	
	0.23	5991	26500	1.90		5.4	258	1190	3.30		
0.75	0.16	8628	34740	0.85		5.9	232	1080	3.60		
	0.21	6562	29300	1.10	T 167D97Y802-4	6.9	199	920	4.30		
	0.26	5355	23700	1.35	TH 167D97Y802-4	0.75	1.9	726	3040	0.80	
	0.34	4079	18200	1.75			2.2	638	2700	0.90	
	0.41	3376	15100	2.10			2.5	562	2610	1.05	
0.75	0.35	3979	17800	1.00	T 157D97Y802-4		2.9	474	2200	1.25	T 87D57Y802-4
	0.45	3051	13600	1.30	TF 157D97Y802-4		3.2	426	1980	1.35	TF 87D57Y802-4
	0.83	1659	7440	2.40	TA 157D97Y802-4		3.7	373	1720	1.55	TA 87D57Y802-4
	1.0	1365	6040	3.00	TAF157D97Y802-4		4.2	330	1520	1.80	TAF87D57Y802-4
0.75	0.42	3311	13600	0.85			4.7	294	1350	2.00	
	0.46	3009	13000	0.95			5.5	250	1160	2.30	
	0.53	2607	11800	1.10			5.8	236	1100	2.25	
	0.72	1926	8930	1.45	T 127D77Y802-4	6.9	201	930	2.60		
	0.79	1757	8150	1.60	TF 127D77Y802-4	0.75	3.8	367	1550	0.90	
	0.90	1541	7120	1.85	TA 127D77Y802-4		4.2	328	1540	1.00	T 77D37Y802-4
	1.0	1342	6220	2.10	TAF127D77Y802-4		4.8	290	1360	1.15	TF 77D37Y802-4
	1.2	1177	5440	2.40			5.5	252	1180	1.30	TA 77D37Y802-4
	1.4	1025	4750	2.40			6.2	221	1030	1.50	TAF77D37Y802-4
	1.5	899	4150	2.80			0.75	7.0	209	1020	2.30
0.75	0.81	1713	7960	1.00	T 107D77Y802-4	7.9		179	900	2.70	TF 87Y802-4
	0.89	1554	7230	1.10	TF 107D77Y802-4	8.4		166	850	2.90	TA 87Y802-4
	1.0	1336	6210	1.30	TA 107D77Y802-4 TAF107D77Y802-4	9.4		148	765	3.20	TAF87Y802-4

选型参数表

Select type parameter table

功率	输出转速	速比	输出扭矩	使用系数	型号	功率	输出转速	速比	输出扭矩	使用系数	型号
P _m	n _a	i	M _a			P _m	n _a	i	M _a		
KW	r/min		Nm	fB		KW	r/min		Nm	fB	
0.75	6.7	140	1080	1.45		0.75	59	22.5	121	1.60	
	7.0	120	1020	1.50	T 77Y90S-6		68	19.7	105	1.75	
	7.9	107	900	1.70	TF 77Y90S-6		80	16.6	89	2.00	
	9.3	101	770	2.00	TA 77Y90S-6		90	15.6	80	2.20	T 37Y802-4
	10	86.7	710	2.20	TAF77Y90S-6		105	13.8	68	2.40	TF 37Y802-4
0.75	9.0	149	800	1.95	T 77Y802-4		114	12.3	63	2.25	TA 37Y802-4
	10	140	700	2.20	TF 77Y802-4		132	10.6	54	2.60	TAF 37Y802-4
	11	120	665	2.30	TA 77Y802-4		155	9.32	46	3.20	
	12	107	590	2.40	TAF77Y802-4		173	8.20	41	3.50	
	14	101	505	2.90			203	7.23	35	3.80	
0.75	11	121	640	1.30	T 67Y802-4		217	6.39	33	4.00	
	13	109	560	1.45	TF 67Y802-4		233	6.00	28	4.50	
	15	94.6	465	1.75	TA 67Y802-4	1.1	0.15	9363	54630	0.80	
	18	73.5	395	2.10	TAF67Y802-4		0.17	8126	47160	0.95	
	20	65.5	360	2.25			0.19	7343	48300	1.05	
	23	60.8	315	2.30			0.21	6747	44300	1.15	T 187D97Y90S-4
	24	58.6	295	2.50			0.23	5991	39200	1.30	TH 187D97Y90S-4
0.75	11	132	645	0.95	T 57Y802-4		0.26	5358	34900	1.45	
	13	105	530	1.10	TF 57Y802-4		0.29	4817	31200	1.60	
	15	91.3	470	1.30	TA 57Y802-4		0.32	4370	28300	1.75	
	18	80.1	395	1.50	TAF57Y802-4	1.1	0.26	5355	31500	0.90	
	20	71.9	360	1.65			0.29	4788	31200	1.05	
	23	63.2	315	1.90			0.34	4079	26800	1.20	
	24	56.6	300	2.00			0.41	3376	22200	1.45	T 167D97Y90S-4
	28	49.7	255	2.40			0.51	2755	18000	1.80	TH 167D97Y90S-4
	31	45.6	230	2.30			0.64	2182	14600	2.20	
0.75	18	76.2	390	1.00	T 47Y802-4		0.82	1704	11300	2.50	
	20	67.0	365	1.10	TF 47Y802-4		0.99	1408	9330	3.10	
	22	60.7	330	1.20	TA 47Y802-4		1.1	1296	8560	3.30	
	24	59.3	295	1.35	TAF47Y802-4	1.1	0.40	3516	20700	0.80	
	28	48.2	255	1.55			0.46	3051	18100	0.90	
	30	47.7	240	1.65			0.54	2610	16900	1.05	
	35	41.5	205	1.95			0.60	2322	15100	1.20	T 157D97Y90S-4
	39	36.4	184	2.20			0.84	1659	11000	1.65	TF 157D97Y90S-4
	44	32.3	162	2.25			1.0	1365	8970	2.00	TA 157D97Y90S-4
							1.1	1229	8030	2.20	TAF157D97Y90S-4
0.75	31	45.6	210	0.85	T 37Y802-4		1.3	1093	7150	2.25	
	36	38.5	197	1.00	TF 37Y802-4		1.5	942	6160	2.60	
	39	35.2	185	1.10	TA 37Y802-4		1.6	854	5550	2.90	
	46	29.3	156	1.30	TAF37Y802-4						
	48	28.0	150	1.35							
	55	25.0	130	1.55							

选型参数表

Select type parameter table

功率	输出转速	速比	输出扭矩	使用系数	型号	功率	输出转速	速比	输出扭矩	使用系数	型号
P _m	n _a	i	M _a			P _m	n _a	i	M _a		
KW	r/min		Nm	fB		KW	r/min		Nm	fB	
1.1	0.73	1926	13100	1.00		1.1	7.9	186	1320	3.00	T 97Y90S-4
	0.80	1757	11900	1.10			9.1	161	1150	3.30	TF 97Y90S-4
	0.91	1541	10400	1.25			10	141	1050	3.70	TA 97Y90S-4
	1.0	1342	9100	1.45							TAF 97Y90S-4
	1.2	1177	7960	1.65	T 127D77Y90S-4	1.1	5.3	179	1990	1.35	T 87Y90L-6
	1.4	1025	6950	1.85	TF 127D77Y90S-4		5.6	166	1880	1.45	TF 87Y90L-6
	1.6	899	6080	2.10	TA 127D77Y90S-4		6.2	148	1680	1.60	TA 87Y90L-6
	1.8	790	5270	2.25	TAF127D77Y90S-4		7.2	129	1450	1.85	TAF 87Y90L-6
1.1	2.0	704	4740	2.40		1.1	8.0	179	1310	2.10	T 87Y90S-4
	2.3	610	4090	2.90			8.5	166	1230	2.20	TF 87Y90S-4
	2.5	549	3690	3.20			9.5	148	1110	2.40	TA 87Y90S-4
	2.9	477	3180	3.70			11	129	950	2.50	TAF 87Y90S-4
							12	115	870	2.80	
	1.2	1166	7920	1.00		1.1	6.8	140	1540	1.00	T 77Y90L-6
	1.4	1030	6920	1.15			7.2	120	1470	1.05	TF 77Y90L-6
	1.5	904	6050	1.30	T 107D77Y90S-4		8.1	107	1300	1.20	TA 77Y90L-6
	1.8	793	5380	1.50	TF 107D77Y90S-4		9.5	101	1110	1.40	TAF 77Y90L-6
	2.0	696	4700	1.70	TA 107D77Y90S-4	1.1	10	140	1020	1.55	
1.1	2.3	615	4120	1.95	TAF107D77Y90S-4		11	120	960	1.60	T 77Y90S-4
	2.7	522	3500	2.30			12	107	850	1.80	TF 77Y90S-4
	3.0	461	3080	2.30			14	101	730	2.10	TA 77Y90S-4
	3.4	408	2720	2.60			16	86.7	670	2.30	TAF 77Y90S-4
	3.8	364	2450	3.00			18	81.5	585	2.40	
	4.4	318	2140	3.40			19	72.5	555	2.50	
	1.9	743	4600	0.85		1.1	23	60.8	455	1.80	
	2.2	652	4000	0.95			24	58.6	430	1.90	
	2.4	573	3910	1.10	T 97D57Y90S-4		29	51.5	365	2.10	T 67Y90S-4
	2.8	504	3400	1.25	TF 97D57Y90S-4		32	45.7	335	2.20	TF 67Y90S-4
	3.2	437	2940	1.45	TA 97D57Y90S-4		36	38.7	290	2.50	TA 67Y90S-4
	3.7	382	2590	1.65	TAF97D57Y90S-4		13	109	810	1.00	TAF 67Y90S-4
	4.1	342	2300	1.85			14	101	770	1.05	
1.1	3.0	474	2900	0.85			16	94.6	675	1.20	
	3.3	426	2600	0.95	T 87D57Y90S-4		18	73.5	575	1.45	
	3.8	373	2520	1.05	TF 87D57Y90S-4		20	65.5	515	1.60	
	4.2	330	2230	1.20	TA 87D57Y90S-4	1.1	16	91.3	610	0.90	
	4.8	294	1980	1.35	TAF87D57Y90S-4		18	80.1	575	1.05	T 57Y90S-4
	5.6	250	1700	1.60			20	71.9	520	1.15	TF 57Y90S-4
	5.9	236	1600	1.70			23	63.2	455	1.30	TA 57Y90S-4
	7.0	201	1360	2.00			24	56.6	430	1.40	TAF 57Y90S-4
1.1	5.2	186	2010	2.10	T 97Y90L-6		29	49.7	365	1.65	
	6.0	161	1750	2.30	TF 97Y90L-6		32	45.6	335	1.80	
	6.6	141	1600	2.40	TA 97Y90L-6						
	7.4	118	1420	2.70	TAF 97Y90L-6						

选型参数表
Select type parameter table

功率 P _m KW	输出转速 n _a r/min	速比 i	输出扭矩 M _a Nm	使用系数 fB	型号	功率 P _m KW	输出转速 n _a r/min	速比 i	输出扭矩 M _a Nm	使用系数 fB	型号
1.1	36	40.0	290	2.10		1.5	0.39	3609	33000	1.50	
	39	35.4	270	2.2			0.46	3062	27800	1.80	T 187D97Y90L-4
	46	31.5	225	2.30			0.56	2519	22800	2.20	TH 187D97Y90L-4
	51	28.2	205	2.60			0.62	2268	20400	2.25	
	58	23.4	181	3.00		1.5	0.35	4079	33030	0.85	
	62	22.0	170	3.20			0.42	3376	30400	1.05	
	72	19.6	145	3.60	T 57Y90S-4		0.51	2755	24700	1.30	T 167D97Y90L-4
	80	16.9	132	3.80	TF 57Y90S-4		0.65	2182	19900	1.60	TH 167D97Y90L-4
	92	15.1	114	4.30	TA 57Y90S-4		0.83	1704	15500	2.10	
	106	13.5	99	4.60	TAF 57Y90S-4		1.0	1408	12800	2.25	
	117	11.9	90	4.20			1.1	1296	11800	2.40	
	124	11.2	85	4.50		1.5	0.61	2322	18700	0.85	
	146	9.36	72	5.10			0.85	1659	15100	1.20	
	161	8.85	65	5.50			1.0	1365	12300	1.45	T 157D97Y90L-4
	186	7.48	57	5.80			1.1	1229	11100	1.65	TF 157D97Y90L-4
	213	6.34	49	6.40			1.3	1093	9840	1.85	TA 157D97Y90L-4
1.1	24	59.3	390	0.95			1.5	942	8480	2.10	TAF157D97Y90L-4
	29	48.2	365	1.10		1.5	1.6	854	7650	2.30	
	30	47.7	345	1.15	T 47Y90S-4		2.5	567	5050	3.30	
	35	41.5	295	1.35	TF 47Y90S-4		2.8	504	3330	3.60	
	40	36.4	265	1.50	TA 47Y90S-4		2.6	536	4820	2.40	T 127D87Y90L-4
	45	32.3	235	1.70	TAF 47Y90S-4		3.4	418	3770	3.20	TF 127D87Y90L-4
	48	28.8	220	1.80			3.8	367	4490	3.50	TA 127D87Y90L-4
	54	26.3	194	2.10							TAF127D87Y90L-4
	64	21.2	164	2.40		1.5	0.80	1757	14600	0.80	
	72	20.3	147	2.50			0.91	1541	12800	0.90	
1.1	47	29.3	210	0.90			1.0	1342	12400	1.05	
	56	25.0	188	1.05			1.2	1177	10900	1.20	T 127D77Y90L-4
	60	22.5	175	1.10			1.4	1025	9470	1.35	TF 127D77Y90L-4
	69	19.7	152	1.20			1.6	899	8300	1.55	TA 127D77Y90L-4
	82	16.6	129	1.40	T 37Y90S-4		1.8	790	7210	1.80	TAF127D77Y90L-4
	91	15.6	115	1.50	TF 37Y90S-4		2.0	704	6480	2.00	
	107	13.8	98	1.70	TA 37Y90S-4		2.3	610	5590	2.30	
	115	12.3	91	1.75	TAF 37Y90S-4		2.6	549	5040	2.30	
	133	10.6	79	2.00			3.0	477	4360	2.70	
	157	9.32	67	2.40			3.4	418	3840	3.10	
	176	8.20	60	2.30		1.5	1.4	1030	8600	0.85	
	206	7.23	51	2.60			1.6	904	7500	0.95	
	220	6.39	48	2.70			1.8	793	7330	1.10	T 107D77Y90L-4
	233	6.00	40	3.20			2.0	696	6420	1.25	TF 107D77Y90L-4
1.5	0.21	6747	54630	0.80			2.3	615	5640	1.40	TA 107D77Y90L-4
	0.24	5991	48330	0.95	T 187D97Y90L-4		2.7	522	4780	1.65	TAF107D77Y90L-4
	0.26	5358	47900	1.05	TH 187D97Y90L-4		3.1	461	4210	1.90	
	0.29	4817	42900	1.20			3.5	408	3720	2.20	
	0.32	4370	38900	1.30			3.9	364	3350	2.40	

选型参数表
Select type parameter table

功率 P _m KW	输出转速 n _a r/min	速比 i	输出扭矩 M _a Nm	使用系数 fB	型号	功率 P _m KW	输出转速 n _a r/min	速比 i	输出扭矩 M _a Nm	使用系数 fB	型号
1.5	4.4	318	2920	2.40	T 107D77Y90L-4 TF 107D77Y90L-4 TA 107D77Y90L-4 TAF107D77Y90L-4	1.5	9.5	101	1510	1.05	T 77Y100L-6
							10	86.7	1390	1.10	TF 77Y100L-6
							12	81.5	1220	1.30	TA 77Y100L-6 TAF77Y100L-6
1.5	2.5	573	4800	0.80		1.5	10	140	1370	1.15	
	2.8	504	4200	0.95			11	120	1310	1.20	
	3.2	437	4020	1.05	T 97D57Y90L-4		12	107	1150	1.35	
	3.7	382	3540	1.20	TF 97D57Y90L-4		15	101	990	1.55	
	4.1	342	3140	1.35	TA 97D57Y90L-4		16	86.7	900	1.70	T 77Y90L-4
	4.6	305	2820	1.50	TAF97D57Y90L-4		18	81.5	795	1.95	TF 77Y90L-4
	5.5	258	2380	1.80			19	72.5	750	2.10	TA 77Y90L-4
	6.1	232	2140	2.00			22	64.8	660	2.40	TAF 77Y90L-4
	7.1	199	1840	2.30			24	58.3	595	2.50	
							28	51.5	520	2.70	
1.5	4.3	330	2800	0.90		1.5	31	45.4	460	3.10	
	4.8	294	2700	1.00	T 87D57Y90L-4		35	40.3	405	3.50	
	5.6	250	2310	1.15	TF 87D57Y90L-4		16	94.6	820	0.90	
	6.0	236	2180	1.25	TA 87D57Y90L-4		18	73.5	775	1.05	
	7.0	201	1860	1.45	TAF87D57Y90L-4		20	65.5	700	1.15	
1.5	7.7	183	1690	1.60			23	60.8	615	1.35	
	4.9	138	2940	2.40	T 107Y112M-8		25	58.6	580	1.40	T 67Y90L-4
	5.8	122	2490	2.90	TF 107Y112M-8		29	51.5	495	1.65	TF 67Y90L-4
	6.2	112	2300	3.20	TA 107Y112M-8 TAF107Y112M-8		32	46.3	450	1.80	TA 67Y90L-4
1.5	5.2	186	2740	1.55	T 97Y100L-6		37	38.7	390	2.00	TAF 67Y90L-4
	6.0	161	2390	1.75	TF 97Y100L-6		40	36.7	360	2.30	
	6.6	141	2180	1.90	TA 97Y100L-6		47	29.3	305	2.40	
	7.4	118	1930	2.20	TAF 97Y100L-6		52	27.3	275	2.70	
1.5	8.0	186	1790	2.40	T 97Y90L-4	1.5	59	24.2	245	3.00	
	9.2	161	1560	2.50	TF 97Y90L-4		23	63.2	560	0.95	
	10	141	1430	2.70	TA 97Y90L-4		25	56.7	585	1.05	
	11	118	1260	3.10	TAF 97Y90L-4		29	49.7	495	1.20	
1.5	8.1	179	1770	1.55			32	45.6	450	1.35	T 57Y90L-4
	8.6	166	1670	1.60			37	40.0	390	1.55	TF 57Y90L-4
	9.6	148	1500	1.80	T 87Y90L-4		39	35.4	365	1.65	TA 57Y90L-4
	11	129	1290	2.10	TF 87Y90L-4		47	31.5	310	1.95	TAF 57Y90L-4
	12	115	1180	2.30	TA 87Y90L-4		52	28.2	280	2.20	
	14	102	1040	2.30	TAF 87Y90L-4		59	23.4	245	2.50	
	16	91.1	880	2.80			62	22.0	230	2.34	
							73	19.6	196	2.60	
1.5	8.1	107	1600	0.90	T 77Y100L-6 TF 77Y100L-6 TA 77Y100L-6 TAF77Y100L-6	1.5	36	41.5	400	1.00	T 47Y90L-4
							40	36.4	360	1.10	TF 47Y90L-4
							45	32.3	320	1.25	TA 47Y90L-4
							48	28.8	300	1.35	TAF 47Y90L-4
							54	26.3	265	1.50	

选型参数表
Select type parameter table

功率 P _m KW	输出转速 n _a r/min	速比	输出扭矩 M _a Nm	使用系数 fB	型号
1.5	65	21.2	220	1.80	
	72	20.3	199	2.00	T 47Y90L-4
	84	16.9	171	2.20	TF 47Y90L-4
	89	15.9	161	2.40	TA 47Y90L-4
	103	13.4	139	2.30	TAF 47Y90L-4
	116	12.3	124	2.50	
	120	11.5	120	2.30	
1.5	60	22.5	220	0.80	
	70	19.7	190	0.90	
	82	16.6	174	1.05	
	92	15.6	156	1.10	T 37Y90L-4
	108	13.8	133	1.25	TF 37Y90L-4
	116	12.3	123	1.30	TA 37Y90L-4
	134	10.6	107	1.50	TAF37Y90L-4
	158	9.32	91	1.75	
	177	8.20	81	1.90	
	207	7.23	69	2.20	
	221	6.39	65	2.20	
	233	6.00	55	2.30	
2.2	0.32	4370	52110	0.85	
	0.39	3609	48800	1.00	
	0.46	3062	41300	1.20	
	0.50	2818	37000	1.35	T 187D97Y100L1-4
	0.56	2519	33800	1.50	TH 187D97Y100L1-4
	0.62	2268	30400	1.65	
	0.69	2054	27400	1.80	
	0.77	1821	24200	2.10	
	0.88	1605	21400	2.30	
2.2	0.51	2755	32940	0.85	
	0.62	2263	29800	1.05	
	0.65	2182	29500	1.10	
	0.83	1704	22900	1.40	T 167D97Y100L1-4
	1.0	1408	19000	1.70	TH 167D97Y100L1-4
	1.1	1296	17400	1.85	
	1.3	1101	14700	2.20	
	1.5	944	12600	2.25	
2.2	0.85	1659	22400	0.80	
	1.0	1365	18300	1.00	T 157D97Y100L1-4
	1.1	1229	16500	1.10	TF 157D97Y100L1-4
	1.3	1093	14600	1.25	TA 157D97Y100L1-4
	1.5	942	12600	1.45	TAF157D97Y100L1-4
	1.6	854	11400	1.60	
	1.9	756	9990	1.80	
功率 P _m KW	输出转速 n _a r/min	速比	输出扭矩 M _a Nm	使用系数 fB	型号
2.2	2.6	536	7180	1.80	
	3.0	473	6310	2.10	T 127D87Y100L1-4
	3.4	418	5600	2.30	TF 127D87Y100L1-4
	3.8	367	4950	2.30	TA 127D87Y100L1-4
	4.3	330	4440	2.60	TAF127D87Y100L1-4
2.2	1.4	1025	12600	0.95	
	1.6	899	12200	1.05	
	1.8	790	10700	1.20	T 127D77Y100L1-4
	2.0	704	9580	1.35	TF 127D77Y100L1-4
	2.3	610	8280	1.55	TA 127D77Y100L1-4
	2.6	549	7460	1.75	TAF127D77Y100L1-4
	3.0	477	6460	2.00	
	3.4	418	5680	2.30	
2.2	2.3	615	7600	0.95	
	2.7	522	7070	1.15	T 107D77Y100L1-4
	3.1	461	6230	1.30	TF 107D77Y100L1-4
	3.5	408	5520	1.45	TA 107D77Y100L1-4
	3.9	364	4940	1.60	TAF107D77Y100L1-4
	4.4	318	4320	1.85	
	4.9	286	3890	2.10	
	5.6	251	3410	2.30	
2.2	3.7	382	4700	0.80	
	4.1	342	4200	0.95	T 97D57Y100L1-4
	4.6	305	4170	1.05	TF 97D57Y100L1-4
	5.5	258	3510	1.20	TA 97D57Y100L1-4
	6.1	232	3160	1.35	TAF97D57Y100L1-4
	7.1	199	2710	1.60	
2.2	8.0	186	2620	1.60	
	9.2	161	2280	1.85	T 97Y100L1-4
	10	141	2090	2.10	TF 97Y100L1-4
	11	118	1850	2.30	TA 97Y100L1-4
	13	105	1570	2.50	TAF97Y100L1-4
	15	93.1	1440	2.70	
2.2	9.6	148	2200	1.20	
	11	129	1890	1.40	
	12	115	1730	1.55	T 87Y100L1-4
	14	102	1530	1.75	TF 87Y100L1-4
	16	91.1	1290	2.10	TA 87Y100L1-4
	18	81.5	1180	2.30	TAF87Y100L1-4
	20	73.4	1050	2.40	
	22	64.2	940	2.60	

选型参数表
Select type parameter table

功率 P _m KW	输出转速 n _a r/min	速比	输出扭矩 M _a Nm	使用系数 fB	型号
2.2	12	107	1550	0.85	
	15	101	1450	1.00	
	16	86.7	1330	1.10	
	18	81.5	1160	1.35	
	19	72.5	1110	1.40	T 77Y100L1-4
	22	64.8	960	1.60	TF 77Y100L1-4
	24	58.3	870	1.75	TA 77Y100L1-4
	28	51.5	760	2.00	TAF77Y100L1-4
	31	45.4	675	2.25	
	35	40.3	590	2.30	
	40	36.1	520	2.70	
2.2	46	32.5	460	3.10	
	48	28.6	430	3.30	
	55	25.5	380	3.70	
	25	58.6	780	0.95	
	29	51.5	720	1.15	
	32	45.7	660	1.25	
	37	38.7	570	1.40	
	40	36.7	530	1.55	
	47	29.3	450	1.80	
	52	27.3	400	2.00	T 67Y100L1-4
	59	24.2	360	2.20	TF 67Y100L1-4
2.2	62	22.8	340	2.30	TA 67Y100L1-4
	73	20.3	280	2.40	TAF67Y100L1-4
	80	18.2	260	2.50	
	93	15.3	220	2.80	
	107	13.5	198	3.10	
	113	12.7	187	2.50	
	133	10.4	160	2.90	
	146	9.82	145	3.00	
	169	8.71	125	3.20	
	194	6.93	109	3.50	
2.2	32	44.1	600	0.90	
	37	40.0	575	1.05	
	39	35.4	530	1.15	T 57Y100L1-4
	47	31.5	450	1.35	TF 57Y100L1-4
	52	28.2	405	1.45	TA 57Y100L1-4
	59	23.4	360	1.65	TAF57Y100L1-4
	62	22.0	340	1.75	
	73	19.6	290	2.00	
	80	16.9	260	2.10	
功率 P _m KW	输出转速 n _a r/min	速比	输出扭矩 M _a Nm	使用系数 fB	型号
2.2	93	15.1	225	2.40	T 57Y100L1-4
	106	13.5	197	2.30	TF 57Y100L1-4
	118	11.9	178	2.30	TA 57Y100L1-4
	125	11.2	168	2.25	TAF57Y100L1-4
2.2	54	26.3	380	1.05	
	65	21.2	325	1.20	
	72	20.3	290	1.35	
	84	16.9	250	1.50	T 47Y100L1-4
	89	15.9	235	1.60	TF 47Y100L1-4
	103	13.4	205	1.75	TA 47Y100L1-4
	116	12.3	180	1.90	TAF47Y100L1-4
	120	11.5	175	1.60	
	133	10.2	159	1.75	
	155	8.99	137	2.10	
2.2	107	13.8	196	0.85	
	133	10.6	157	1.00	T 37Y100L1-4
	157	9.32	134	1.20	TF 37Y100L1-4
	176	8.20	119	1.30	TA 37Y100L1-4
	206	7.23	102	1.45	TAF37Y100L1-4
	220	6.39	96	1.50	
	233	6.00	81	1.75	
3.0	0.46	3062	51390	0.90	
	0.50	2818	46200	0.95	
	0.56	2519	46800	1.05	
	0.62	2268	42100	1.20	T 187D97Y100L2-4
	0.68	2054	38000	1.30	TH187D97Y100L2-4
	0.77	1821	33600	1.50	
	0.87	1605	29700	1.70	
	1.0	1395	25600	1.95	
	1.2	1196	22100	2.30	
3.0	0.82	1704	31700	1.00	
	0.99	1408	26200	1.20	
	1.1	1296	24100	1.35	T 167D97Y100L2-4
	1.3	1101	20300	1.55	TH167D97Y100L2-4
	1.5	944	17500	1.85	
	1.7	843	15500	2.10	
	1.9	757	14000	2.30	
3.0	1.1	1229	20600	0.80	T 157D97Y100L2-4
					TF 157D97Y100L2-4
					TA 157D97Y100L2-4
					TAF157D97Y100L2-4

选型参数表
Select type parameter table

功率 P _m KW	输出转速 n _a r/min	速比 i	输出扭矩 M _a Nm	使用系数 fB	型号	功率 P _m KW	输出转速 n _a r/min	速比 i	输出扭矩 M _a Nm	使用系数 fB	型号
3.0	1.3	1093	18300	0.90		3.0	14	93.1	1980	2.20	
	1.5	942	17500	1.05	T 157D97Y100L2-4		16	88.1	1770	2.40	T 97Y100L2-4
	1.6	854	15800	1.15	TF 157D97Y100L2-4		18	79.1	1590	2.50	TF 97Y100L2-4
	1.9	756	13900	1.30	TA 157D97Y100L2-4		20	74.7	1440	2.70	TA 97Y100L2-4
	2.5	567	10500	1.70	TAF157D97Y100L2-4		22	66.9	1280	3.10	TAF 97Y100L2-4
	2.8	504	9310	1.95			25	56.9	1160	3.40	
3.0	2.6	536	9940	1.30		3.0	9.5	148	2800	0.90	
	3.0	473	8750	1.50	T 127D87Y100L2-4		11	129	2600	1.05	
	3.3	418	7760	1.70	TF 127D87Y100L2-4		12	115	2370	1.15	
	3.8	367	6840	1.90	TA 127D87Y100L2-4		14	102	2100	1.30	
	4.2	330	6140	2.10	TAF127D87Y100L2-4		16	91.1	1770	1.55	T 87Y100L2-4
	4.9	287	5300	2.25			18	81.5	1620	1.65	TF 87Y100L2-4
3.0	1.8	790	13400	0.90			20	73.4	1440	1.85	TA 87Y100L2-4
	2.0	704	13200	1.00	T 127D77Y100L2-4		22	64.2	1290	2.10	TAF 87Y100L2-4
	2.3	610	11400	1.15	TF 127D77Y100L2-4		25	57.6	1160	2.30	
	2.5	549	10300	1.25	TA 127D77Y100L2-4		28	51.2	1010	2.40	
	2.9	477	8920	1.45	TAF127D77Y100L2-4		32	45.5	900	2.60	
	3.3	418	7840	1.65			38	36.7	745	3.00	
3.0	3.0	461	7750	0.95		3.0	16	86.7	1640	0.85	
	3.4	408	7620	1.05			18	81.5	1450	0.90	
	3.8	364	6820	1.15	T 107D77Y100L2-4		19	72.5	1510	1.00	
	4.4	318	5960	1.35	TF 107D77Y100L2-4		22	64.8	1330	1.10	T 77Y100L2-4
	4.9	286	5370	1.50	TA 107D77Y100L2-4		24	58.3	1190	1.30	TF 77Y100L2-4
	5.6	251	4700	1.70	TAF107D77Y100L2-4		27	51.5	1050	1.50	TA 77Y100L2-4
	6.3	222	4150	1.95			31	45.4	920	1.70	TAF 77Y100L2-4
	7.1	196	3670	2.20			35	40.3	820	1.90	
	8.1	174	3250	2.20			35	40.3	820	1.90	
	9.1	154	2880	2.25			40	36.1	720	2.20	
	10	140	2610	2.50			40	36.1	720	2.20	
							45	32.5	630	2.30	
3.0	5.4	258	4400	0.90	T 97D57Y100L2-4	3.0	32	46.3	820	0.90	
	6.0	232	4360	1.00	TF 97D57Y100L2-4		36	38.7	785	1.00	
	7.0	199	3740	1.15	TA 97D57Y100L2-4 TAF97D57Y100L2-4		39	36.7	730	1.15	
3.0					T 107Y100L2-4		46	29.3	620	1.35	
	9.8	138	2940	2.40	TF 107Y100L2-4		51	27.3	560	1.45	T 67Y100L2-4
	12	122	2490	2.90	TA 107Y100L2-4 TAF107Y100L2-4		58	24.2	490	1.65	TF 67Y100L2-4
3.0	7.9	186	3600	1.15	T 97Y100L2-4		62	22.8	465	1.70	TA 67Y100L2-4
	9.1	161	3140	1.35	TF 97Y100L2-4		73	20.3	395	1.95	TAF 67Y100L2-4
	10	141	2870	1.45	TA 97Y100L2-4		80	18.2	360	2.10	
	11	118	2540	1.65	TAF 97Y100L2-4		92	15.3	310	2.20	
	13	105	2150	1.95			106	13.5	270	2.50	
							112	12.7	255	2.10	

选型参数表
Select type parameter table

功率 P _m KW	输出转速 n _a r/min	速比 i	输出扭矩 M _a Nm	使用系数 fB	型号	功率 P _m KW	输出转速 n _a r/min	速比 i	输出扭矩 M _a Nm	使用系数 fB	型号
3.0	132	10.4	220	2.30	T 67Y100L2-4	4.0	0.63	2268	50040	0.90	
	145	9.82	198	2.40	TF 67Y100L2-4		0.69	2054	50300	1.00	
					TA 67Y100L2-4		0.78	1821	44500	1.10	
					TAF 67Y100L2-4		0.88	1605	39300	1.25	T 187D97Y112M-4
3.0	46	31.5	570	0.95			1.0	1395	34000	1.45	TH187D97Y112M-4
	51	28.2	560	1.05			1.2	1196	29200	1.70	
	58	23.4	490	1.20			1.4	1046	25600	1.95	
	62	22.0	465	1.30			1.5	945	23100	2.20	
	72	19.6	395	1.45		4.0	1.0	1408	31140	0.90	
	80	16.9	360	1.55	T 57Y100L2-4		1.1	1296	31900	1.00	
	92	15.1	310	1.70	TF 57Y100L2-4		1.3	1101	26900	1.20	T 167D97Y112M-4
	106	13.5	270	1.90	TA 57Y100L2-4		1.5	944	23100	1.40	TH167D97Y112M-4
	117	11.9	245	1.70	TAF 57Y100L2-4		1.7	843	20500	1.55	
	124	11.2	230	1.80			1.9	757	18500	1.75	
	146	9.36	196	2.10			2.2	632	15400	2.10	
	161	8.85	178	2.20		4.0	1.7	854	19000	0.85	T 157D97Y112M-4
	186	7.48	154	2.20			1.9	756	18400	1.00	TF 157D97Y112M-4
	213	6.34	134	2.30			2.5	567	13800	1.30	TA 157D97Y112M-4
3.0	72	20.3	400	1.00			2.8	504	12300	1.45	TAF157D97Y112M-4
	83	16.9	345	1.10			3.3	434	10600	1.70	
	88	15.9	325	1.15		4.0	2.7	536	13100	1.00	
	103	13.4	280	1.30	T 47Y100L2-4		3.0	473	11600	1.10	T 127D87Y112M-4
	115	12.3	250	1.40	TF 47Y100L2-4		3.4	418	10300	1.25	TF 127D87Y112M-4
	119	11.5	240	1.15	TA 47Y100L2-4		3.9	367	9040	1.45	TA 127D87Y112M-4
	133	10.2	215	1.30	TAF 47Y100L2-4		4.3	330	8120	1.60	TAF127D87Y112M-4
	154	8.99	186	1.50			5.0	287	7010	1.85	
	164	8.47	175	1.55			5.6	253	6200	2.10	
	190	7.53	151	1.65		4.0	2.3	610	13600	0.85	T 127D77Y112M-4
	213	6.70	135	1.80			2.6	549	12240	0.95	TF 127D77Y112M-4
	241	5.84	119	1.95			3.0	477	11800	1.10	TA 127D77Y112M-4
3.0	157	9.32	160	0.90	T 37Y100L2-4		3.4	418	10300	1.25	TAF127D77Y112M-4
	176	8.20	150	0.95	TF 37Y100L2-4	4.0	3.9	364	8100	0.90	
	206	7.23	139	1.10	TA 37Y100L2-4		4.5	318	7860	1.00	T 107D77Y112M-4
	220	6.39	130	1.10	TAF 37Y100L2-4		5.0	286	7080	1.15	TF 107D77Y112M-4
	233	6.00	110	1.30			5.7	251	6200	1.30	TA 107D77Y112M-4
4.0	1.7	835	20300	2.25	T 187D107Y112M-4		6.4	222	5470	1.45	TAF107D77Y112M-4
	2.7	520	12600	3.60	TH187D107Y112M-4		7.2	196	4840	1.65	
4.0	0.56	2519	55710	0.80	T 187D97Y112M-4						
					TH187D97Y112M-4						

选型参数表
Select type parameter table

功率	输出转速	速比	输出扭矩	使用系数	型号	功率	输出转速	速比	输出扭矩	使用系数	型号
P _m	n _a	i	M _a			P _m	n _a	i	M _a		
KW	r/min		Nm	fB		KW	r/min		Nm	fB	
4.0	8.2	174	4290	1.70	T 107D77Y112M-4	4.0	29	51.2	1320	2.00	T 87Y112M-4
	9.2	154	3800	1.90	TF 107D77Y112M-4		32	45.5	1180	2.20	TF 87Y112M-4
	10	140	3440	2.10	TA 107D77Y112M-4 TAF107D77Y112M-4		39	36.7	980	2.50	TA 87Y112M-4 TAF 87Y112M-4
4.0	7.1	199	4450	0.85	T 97D57Y112M-4	4.0	22	64.8	1600	0.85	
					TF 97D57Y112M-4		24	58.3	1570	0.90	
					TA 97D57Y112M-4		28	51.5	1380	1.05	
					TAF 97D57Y112M-4		31	45.4	1210	1.20	T 77Y112M-4
4.0	5.3	134	7220	1.65	T 127Y160M1-8		35	40.3	1080	1.35	TF 77Y112M-4
	5.9	126	6500	1.85	TF 127Y160M1-8		37	38.1	1030	1.45	TA 77Y112M-4
	6.5	112	5850	2.00	TA 127Y160M1-8 TAF127Y160M1-8		40	36.1	950	1.55	TAF 77Y112M-4
4.0	6.6	151	5810	2.10	T 127Y132M1-6		46	32.5	830	1.75	
	7.1	134	5420	2.20	TF 127Y132M1-6		49	28.6	785	1.85	
	7.8	126	4870	2.50	TA 127Y132M1-6		55	25.5	690	2.10	
	8.7	112	4380	2.70	TAF127Y132M1-6		62	24.1	620	2.30	
4.0	9.9	138	3860	1.85			70	21.0	545	2.70	
						4.0	47	29.3	810	0.90	
							52	27.3	735	1.00	
							59	24.2	645	1.10	
					T 107Y112M-4		63	22.8	610	1.20	
					TF 107Y112M-4		74	20.3	520	1.35	T 67Y112M-4
					TA 107Y112M-4		81	18.2	470	1.45	TF 67Y112M-4
					TAF107Y112M-4		94	15.3	410	1.60	TA 67Y112M-4
							107	13.5	355	1.75	TAF 67Y112M-4
							114	12.7	335	1.60	
4.0	9.3	161	4120	1.00			134	10.4	285	1.75	
						4.0	147	9.82	260	1.85	
							170	8.71	225	1.95	
							195	6.93	196	2.10	
					T 97Y112M-4		59	23.4	580	0.95	
					TF 97Y112M-4		63	22.0	610	1.00	
					TA 97Y112M-4		73	19.6	520	1.10	
					TAF 97Y112M-4		81	16.9	475	1.15	
							93	15.1	410	1.30	T 57Y112M-4
							107	13.5	355	1.45	TF 57Y112M-4
4.0	12	115	2900	0.85			119	11.9	320	1.30	TA 57Y112M-4
						4.0	126	11.2	305	1.35	TAF 57Y112M-4
					T 87Y112M-4		148	9.36	260	1.55	
					TF 87Y112M-4		163	8.85	235	1.65	
					TA 87Y112M-4		188	7.48	205	1.80	
					TAF 87Y112M-4		216	6.34	177	1.95	
	23	64.2	1690	1.60							
	25	57.6	1520	1.75							

选型参数表
Select type parameter table

功率	输出转速	速比	输出扭矩	使用系数	型号	功率	输出转速	速比	输出扭矩	使用系数	型号
P _m	n _a	i	M _a			P _m	n _a	i	M _a		
KW	r/min		Nm	fB		KW	r/min		Nm	fB	
5.5	0.79	1821	54990	0.80		5.5	10	138	5270	1.35	
	0.89	1605	48510	0.95			12	122	4460	1.60	T 107Y132S-4
	1.0	1395	46700	1.05			13	112	4130	1.75	TF 107Y132S-4
	1.2	1196	40100	1.25	T 187D97Y132S-4		14	99.3	3700	1.95	TA 107Y132S-4
	1.4	1046	35100	1.45	TH187D97Y132S-4		16	89.4	3340	2.20	TAF107Y132S-4
	1.5	945	31700	1.60			17	79.0	3030	2.40	
	1.9	738	24800	2.00		5.5	12	118	4100	0.90	
5.5	2.3	621	20800	2.40			14	105	3860	1.10	
	1.3	1101	33210	0.85			15	93.1	3560	1.20	
	1.5	944	31700	1.00			17	88.1	3180	1.30	T 97Y132S-4
	1.7	843	28200	1.15			18	79.1	2860	1.45	TF 97Y132S-4
	1.9	757	25400	1.25	T 167D97Y132S-4		20	74.7	2590	1.60	TA 97Y132S-4
5.5	2.3	632	21200	1.50	TH167D97Y132S-4		23	66.9	2300	1.85	TAF 97Y132S-4
	2.5	561	18700	1.70			25	56.9	2080	2.00	
	3.0	481	16100	2.00			30	47.9	1760	2.40	
	3.4	423	14100	2.30		5.5	17	91.1		0.85	
	2.2	661	19900	0.80			18	81.5	2650	0.95	
	2.5	567	17000	0.95	T 157D97Y132S-4		20	73.4	2590	1.05	
5.5	2.8	504	16900	1.05	TF 157D97Y132S-4		23	64.2	2310	1.15	T 87Y132S-4
	3.3	434	14500	1.25	TA 157D97Y132S-4		25	57.6	2080	1.30	TF 87Y132S-4
	3.8	379	12700	1.40	TAF 157D97Y132S-4		29	51.2	1810	1.50	TA 87Y132S-4
	4.3	333	11100	1.60			32	45.5	1620	1.60	TAF 87Y132S-4
5.5	3.4	418	12700	0.90			39	36.7	1340	1.85	
	3.9	367	12400	1.05			46	32.1	1150	2.30	
	4.3	330	11100	1.15			51	28.8	1020	2.50	
5.5	5.0	287	9620	1.35	T 127D87Y132S-4	5.5	32	45.4	1500	0.85	
	5.6	253	8510	1.55	TF 127D87Y132S-4		36	40.3	1470	1.00	
	6.7	213	7150	1.80	TA 127D87Y132S-4		46	32.5	1130	1.30	
	7.1	200	6740	1.80	TAF 127D87Y132S-4		49	28.6	1070	1.35	
	8.6	166	5580	2.20			56	25.5	940	1.55	T 77Y132S-4
	9.8	147	4920	2.40			62	24.1	850	1.70	TF 77Y132S-4
5.5	6.4	222	7490	1.05	T 107D77Y132S-4		71	21.0	745	1.95	TA 77Y132S-4
	7.3	196	6640	1.20	TF 107D77Y132S-4		80	18.1	655	2.20	TAF 77Y132S-4
	8.2	174	5870	1.25	TA 107D77Y132S-4		90	16.2	580	2.40	
	9.3	154	5200	1.40	TAF107D77Y132S-4		106	14.6	495	2.30	
	10	140	4720	1.55			116	12.9	455	2.20	
	4.7	142	11100	1.60	T 157Y160M2-8		132	10.8	400	2.30	
5.5	5.8	126	9050	2.00	TF 157Y160M2-8						
	7.1	102	7410	2.40	TA 157Y160M2-8						
	7.8	90.9	6780	2.50	TAF157Y160M2-8						
	7.1	134	7450	1.60	T 127Y132M2-6						
5.5	7.8	126	6700	1.80	TF 127Y132M2-6						
	8.7	112	6030	2.00	TA 127Y132M2-6						
	11	86.1	4920	2.40	TAF127Y132M2-6						

选型参数表
Select type parameter table

功率	输出转速	速比	输出扭矩	使用系数	型号	功率	输出转速	速比	输出扭矩	使用系数	型号	
P _m	n _a	i	M _a			P _m	n _a	i	M _a			
KW	r/min		Nm	fB		KW	r/min		Nm	fB		
5.5	60	24.2	790	0.80		7.5	4.3	330	13700	0.85		
	63	22.8	750	0.85			5.0	287	13200	1.00	T 127D87Y132M-4	
	74	20.3	710	1.00			5.6	253	11600	1.10	TF 127D87Y132M-4	
	82	18.2	645	1.05	T 67Y132S-4		6.7	213	9790	1.35	TA 127D87Y132M-4	
	94	15.3	560	1.15	TF 67Y132S-4		7.1	200	9220	1.30	TAF127D87Y132M-4	
	108	13.5	485	1.30	TA 67Y132S-4		8.6	166	7640	1.55		
	115	12.7	460	1.15	TAF 67Y132S-4		9.8	147	6740	1.80		
	135	10.4	390	1.30		7.5	4.4	160	16400	1.95	T 167Y160L-8	
	148	9.82	355	1.35			5.3	137	13400	2.40	TH 167Y160L-8	
	171	8.71	305	1.45		7.5	5.8	160	12300	2.30	T 167Y160M-6	
196	7.33	265	1.55		7.1		137	10100	2.90	TH 167Y160M-6		
5.5	81	16.9	580	0.85		7.5	6.4	142	11200	1.60		
	94	15.1	510	0.95			7.8	126	9130	1.95	T 157Y160M-6	
	108	13.5	485	1.05			9.6	102	7480	2.40	TF 157Y160M-6	
	120	11.9	400	0.95	T 57Y132S-4		10	90.9	6840	2.50	TA 157Y160M-6	
	127	11.2	415	1.00	TF 57Y132S-4		12	77.5	5950	2.70	TAF157Y160M-6	
	149	9.36	350	1.15	TA 57Y132S-4		7.5	7.1	134	10200	1.20	T 127Y160M-6
	164	8.85	320	1.20	TAF 57Y132S-4	7.8		126	9140	1.30	TF 127Y160M-6	
	190	7.48	275	1.30		8.7		112	8220	1.45	TA 127Y160M-6	
	218	6.34	240	1.45		7.5	11	86.1	6710	1.80	TAF127Y160M-6	
7.5	1.7	835	38200	1.30	T 187D107Y132M-4		9.8	151	7320	1.65		
	2.0	729	33300	1.50	TH187D107Y132M-4		11	134	6820	1.75	T 127Y132M-4	
	2.3	622	28400	1.75			12	126	6130	1.95	TF 127Y132M-4	
7.5	1.2	1196	49500	0.90			13	112	5220	2.20	TA 127Y132M-4	
	1.4	1046	48000	1.05			16	86.1	4500	2.70	TAF127Y132M-4	
	1.5	945	43400	1.15			17	77.0	4110	2.90		
	1.9	738	33900	1.45	T 187D97Y132M-4		20	69.2	3550	3.40		
	2.3	621	28500	1.75	TH187D97Y132M-4		7.5	10	138	7190	1.00	
	2.7	527	24100	2.10				12	122	6080	1.20	
7.5	1.7	843	34830	0.85		13		112	5630	1.30		
	1.9	757	31230	0.90		14		99.3	5050	1.45	T 107Y132M-4	
	2.3	632	29000	1.10	T 167D97Y132M-4	16		89.4	4560	1.60	TF 107Y132M-4	
	2.5	561	25700	1.25	TH167D97Y132M-4	17		79.0	4140	1.75	TA 107Y132M-4	
	3.0	481	22100	1.45		20		70.3	3670	1.95	TAF107Y132M-4	
	3.4	423	19400	1.65		22		66.5	3330	2.20		
	3.9	369	16900	1.90		25		59.4	2860	2.50		
	7.5	3.3	434	18000	0.90	T 157D97Y132M-4	29	50.4	2500	2.70		
3.8		379	17400	1.05	TF 157D97Y132M-4	34	42.7	2120	3.20			
4.3		333	15300	1.20	TA 157D97Y132M-4	39	35.4	1850	3.50			
4.9		291	13300	1.35	TAF157D97Y132M-4							

选型参数表
Select type parameter table

功率 P _m KW	输出转速 n _a r/min	速比 i	输出扭矩 M _a Nm	使用系数 fB	型号	功率 P _m KW	输出转速 n _a r/min	速比 i	输出扭矩 M _a Nm	使用系数 fB	型号
7.5	15	93.1	4500	0.85		11.0	4.5	318	21300	1.50	
	17	88.1	4330	0.95			5.2	278	18600	1.70	T 167D107Y160M-4
	18	79.1	3900	1.10	T 97Y132M-4		5.9	244	16300	1.95	TH167D107Y160M-4
	20	74.7	3530	1.20	TF 97Y132M-4		6.8	213	14200	2.20	
	23	66.9	3130	1.35	TA 97Y132M-4		7.0	206	13700	2.30	
	25	56.9	2830	1.50	TAF 97Y132M-4	11.0	2.6	561	33750	0.85	
	30	47.9	2400	1.75			3.0	481	32300	1.00	T 167D97Y160M-4
	34	40.7	2100	2.00			3.4	423	28300	1.15	TH167D97Y160M-4
	37	36.4	1920	2.20			3.9	369	24700	1.30	
	42	33.9	1710	2.50							
7.5	23	64.2	2900	0.85		11.0	4.3	333	20100	0.80	T 157D97Y160M-4
	25	57.6	2600	0.95			4.9	291	17600	0.90	TF 157D97Y160M-4 TA 157D97Y160M-4 TAF157D97Y160M-4
	29	51.2	2460	1.10							
	32	45.5	2200	1.20		11.0	6.8	213	12900	0.90	T 127D87Y160M-4
	39	36.7	1830	1.35	T 87Y132M-4		7.2	200	12200	0.90	TF 127D87Y160M-4
	46	32.1	1570	1.70	TF 87Y132M-4		8.7	166	11200	1.10	TA 127D87Y160M-4
	51	28.8	1400	1.85	TA 87Y132M-4		9.8	147	9850	1.20	TAF127D87Y160M-4
	57	26.0	1250	2.00	TAF 87Y132M-4						
	64	22.3	1120	2.00		11.0	5.3	137	19700	1.60	T 167Y180L-8
	74	20.2	970	2.40			6.6	111	16000	2.00	TH 167Y180L-8
82	18.2	870	2.25								
89	15.9	800	2.20		11.0		5.8	160	18000	1.80	T 167Y160L-6
99	14.3	725	2.60		7.1		137	14800	2.20	TH 167Y160L-6	
7.5	46	32.5	1550	0.95		11.0	8.8	160	12000	2.70	T 167Y160M-4
	49	28.6	1470	1.00			11	137	9850	2.90	TH 167Y160M-4
	56	25.5	1280	1.15							
	62	24.1	1160	1.25		11.0	5.9	126	17900	1.00	T 157Y180L-8
	71	21.0	1010	1.45	T 77Y132M-4		7.2	102	14600	1.25	TF 157Y180L-8
	80	18.1	890	1.60	TF 77Y132M-4		7.9	90.9	13400	1.35	TA 157Y180L-8
	90	16.2	795	1.75	TA 77Y132M-4		9.0	77.5	11600	1.55	TAF157Y180L-8
	106	14.6	675	1.85	TAF 77Y132M-4						
	116	12.9	620	1.55		11.0	9.6	142	11000	1.65	T 157Y160M-4
	132	10.8	545	1.70			12	126	8930	2.00	TF 157Y160M-4
150	9.40	480	1.85		14		102	7310	2.50	TA 157Y160M-4	
169	8.45	425	1.95		16		90.9	6690	2.70	TAF157Y160M-4	
198	7.22	365	2.10								
11.0	1.7	835	50310	0.90		11.0	11	134	9930	1.20	
	2.0	729	48800	1.05	T 187D107Y160M-4		12	126	8930	1.35	T 127Y160M-4
	2.3	622	41600	1.20	TH187D107Y160M-4		13	112	8040	1.50	TF 127Y160M-4
	2.8	520	34800	1.45			16	86.1	6560	1.85	TA 127Y160M-4
	3.2	454	30400	1.65			18	77.0	5980	2.00	TAF127Y160M-4
	4.1	355	23800	2.10			20	69.2	5180	2.30	
11.0	2.0	738	49600	1.00	T 187D97Y160M-4						
	2.3	621	41700	1.20	TH187D97Y160M-4						
	2.7	527	35300	1.40							

选型参数表
Select type parameter table

功率	输出转速	速比	输出扭矩	使用系数	型号	功率	输出转速	速比	输出扭矩	使用系数	型号
P _m	n _a	i	M _a			P _m	n _a	i	M _a		
KW	r/min		Nm	fB		KW	r/min		Nm	fB	
11.0	13	112	8200	0.90		15.0	2.3	622	50490	0.90	
	14	99.3	7350	1.00			2.8	520	47000	1.05	T 187D107Y160L-4
	16	89.4	6630	1.10	T 107Y160M-4		3.2	454	41000	1.20	TH187D107Y160L-4
	17	79.0	6030	1.20	TF 107Y160M-4		4.1	355	32100	1.55	
	20	70.3	5350	1.35	TA 107Y160M-4		5.6	261	23600	2.10	
	22	66.5	4850	1.50	TAF107Y160M-4	15.0	4.6	318	28700	1.10	
	25	59.4	4170	1.75			5.3	278	25000	1.30	
	29	50.4	3640	2.00			6.0	244	22000	1.45	
	34	42.7	3090	2.30			6.8	213	19200	1.65	T 167D107Y160L-4
	39	35.4	2700	2.70			7.1	206	18500	1.75	TH167D107Y160L-4
11.0	20	74.7	5150	0.80			8.1	180	16200	1.95	
	23	66.9	4560	0.90			9.1	160	14400	2.20	
	25	56.9	4130	1.00	T 97Y160M-4	15.0	6.3	230	20700	0.85	
	30	47.9	3500	1.20	TF 97Y160M-4		6.9	213	19200	0.95	T 157D107Y160L-4
	34	40.7	3050	1.40	TA 97Y160M-4		7.8	187	16800	1.05	TF 157D107Y160L-4
	38	36.4	2790	1.50	TAF 97Y160M-4		9.3	157	14200	1.25	TA 157D107Y160L-4
	42	33.9	2500	1.70			12	122	11000	1.65	TAF157D107Y160L-4
	47	31.4	2250	1.85			14	107	9630	1.85	
	52	28.1	2040	2.10		15.0	5.4	179	26600	1.90	T 187Y180L-6
	58	25.8	1800	2.30			5.9	166	24400	2.00	TH 187Y180L-6
	64	22.8	1630	2.60		15.0	7.2	137	19900	1.60	T 167Y180L-6
11.0	33	45.5	3210	0.80			8.8	111	16200	1.95	TH 167Y180L-6
	39	36.7	2660	0.95		15.0	8.9	160	16100	2.00	T 167Y160L-4
	46	32.1	2290	1.20			11	137	13200	2.40	TH 167Y160L-4
	52	28.8	2030	1.30		15.0	9.7	142	14800	1.20	T 157Y160L-4
	58	26.0	1820	1.40	T 87Y160M-4		12	126	12000	1.50	TF 157Y160L-4
	64	22.3	1630	1.40	TF 87Y160M-4		15	102	9830	1.85	TA 157Y160L-4
	74	20.2	1420	1.60	TA 87Y160M-4		16	90.9	8990	2.00	TAF157Y160L-4
	83	18.2	1270	1.75	TA 87Y160M-4		18	77.5	7820	2.30	
	90	15.9	1170	1.55	TAF87Y160M-4	15.0	11	134	13400	0.90	
	100	14.3	1050	2.00			12	126	12000	1.00	
	115	12.9	920	2.20			13	112	10800	1.10	T 127Y160L-4
	129	11.1	810	1.85			16	86.1	8820	1.35	TF 127Y160L-4
	144	9.36	730	2.10			18	77.0	8040	1.50	TA 127Y160L-4
	174	8.23	605	2.30			21	69.2	6960	1.70	TAF127Y160L-4
	200	7.24	525	2.50			23	60.3	6140	1.95	
11.0	62	24.1	1680	0.85			27	53.7	5300	2.30	
	71	21.0	1480	1.00			31	46.8	4690	2.60	
	81	18.1	1300	1.10	T 77Y160M-4						
	91	16.2	1160	1.20	TF 77Y160M-4						
	107	14.6	990	1.25	TA 77Y160M-4						
	117	12.9	900	1.10	TAF77Y160M-4						
	133	10.8	790	1.20							
	151	9.40	700	1.25							
	170	8.45	620	1.35							
	199	7.22	530	1.45							

选型参数表
Select type parameter table

功率	输出转速	速比	输出扭矩	使用系数	型号	功率	输出转速	速比	输出扭矩	使用系数	型号
P _m	n _a	i	M _a			P _m	n _a	i	M _a		
KW	r/min		Nm	fB		KW	r/min		Nm	fB	
15.0	16	89.4	8920	0.80		18.5	7.8	187	20700	0.85	T 157D107Y180M-4
	18	79.0	8110	0.90			9.3	157	17400	1.05	TF 157D107Y180M-4
	20	70.3	7190	1.00			12	122	13600	1.35	TA 157D107Y180M-4
	22	66.5	6530	1.10	T 107Y160L-4		14	107	11900	1.50	TAF157D107Y180M-4
	26	59.4	5610	1.30	TF 107Y160L-4	18.5	5.4	179	32800	1.55	
	29	50.4	4900	1.45	TA 107Y160L-4		5.9	166	30100	1.65	T 187Y200L1-6
	34	42.7	4150	1.75	TAF 107Y160L-4		6.7	146	26300	1.90	TH187Y200L1-6
	39	35.4	3630	2.00			7.5	129	23600	2.10	
	45	31.5	3210	2.20		18.5	8.1	179	21700	2.30	
	47	29.8	3070	2.20			8.9	166	19900	2.25	T 187Y180M-4
15.0	50	29.3	2840	2.50			10	146	17400	2.60	TA187Y180M-4
	30	47.9	4700	0.90			11	129	15600	2.90	
	35	40.7	4110	1.00		18.5	11	137	16300	1.95	
	38	36.4	3760	1.10	T 97Y160L-4		13	111	13200	2.40	T 167Y180M-4
	43	33.9	3360	1.25	TF 97Y160L-4		17	87.1	10600	2.70	TH167Y180M-4
	47	31.4	3020	1.40	TA 97Y160L-4	18.5	12	126	14800	1.20	
	52	28.1	2740	1.55	TAF 97Y160L-4		15	102	12100	1.50	
	59	25.8	2430	1.75			16	90.9	11100	1.65	
	65	22.8	2190	1.90			18	77.5	9620	1.85	T 157Y180M-4
	77	18.4	1860	2.30			21	70.1	8490	2.10	TF 157Y180M-4
15.0	88	16.5	1620	2.60			24	63.8	7360	2.50	TA 157Y180M-4
	47	32.1	3080	0.90			27	53.9	6550	2.80	TAF157Y180M-4
	52	28.8	2730	0.95			31	46.2	5640	3.20	
	59	26.0	2440	1.00			39	38.9	4580	3.90	
	65	22.3	2200	1.05		18.5	13	112	13300	0.90	
	75	20.2	1910	1.20	T 87Y160L-4		16	86.1	10800	1.10	
	84	18.2	1710	1.30	TF 87Y160L-4		18	77.0	9890	1.20	
	91	15.9	1570	1.15	TA 87Y160L-4		21	69.2	8560	1.40	T 127Y180M-4
	101	14.3	1420	1.50	TAF 87Y160L-4		23	60.3	7550	1.60	TF 127Y180M-4
	116	12.9	1230	1.60			27	53.7	6520	1.85	TA 127Y180M-4
	131	11.1	1100	1.35			31	46.8	5770	2.10	TAF127Y180M-4
	146	9.36	980	1.55			36	40.7	4850	2.40	
	176	8.23	810	1.70			40	36.1	4370	2.70	
	202	7.24	705	1.85			47	32.3	3780	2.90	
18.5	2.8	520	52020	0.85		18.5	53	29.0	3340	3.40	
	3.2	454	50400	1.00	T 187D107Y180M-4						
	4.1	355	39500	1.25	TH187D107Y180M-4						
	5.6	261	29000	1.70							
	6.6	221	24600	2.00							
18.5	4.6	318	31770	0.90							
	5.3	278	30800	1.05							
	6.0	244	27100	1.20	T 167D107Y180M-4						
	6.9	213	23600	1.35	TH167D107Y180M-4						
	7.1	206	22800	1.40							
	8.1	180	20000	1.60							

选型参数表
Select type parameter table

功率	输出转速	速比	输出扭矩	使用系数	型号	功率	输出转速	速比	输出扭矩	使用系数	型号
P _m	n _a		M _a			P _m	n _a		M _a		
KW	r/min		Nm	fB		KW	r/min		Nm	fB	
18.5	20	70.3	8840	0.80		22	5.3	278	33030	0.85	
	22	66.5	8020	0.90			6.0	244	32200	1.00	
	26	59.4	6890	1.05			6.9	213	28200	1.15	T 167D107Y180L-4
	29	50.4	6020	1.20			7.1	206	27200	1.20	TH167D107Y180L-4
	35	42.7	5100	1.40	T 107Y180M-4		8.1	180	23800	1.35	
	40	35.4	4460	1.60	TF 107Y180M-4		9.2	160	21100	1.50	
	45	31.5	3940	1.85	TA 107Y180M-4		11	135	17900	1.80	
	47	29.8	3770	1.80	TAF107Y180M-4		12	118	15600	2.00	
	51	29.3	3500	2.10		22	9.3	157	20800	0.85	T 157D107Y180L-4
	56	26.6	3170	2.30			12	122	16200	1.10	TF 157D107Y180L-4
	65	22.3	2730	2.60			14	107	14100	1.25	TA 157D107Y180L-4
	74	20.6	2380	3.00							TAF 157D107Y180L-4
	88	17.4	2020	3.40							
18.5	35	40.7	5050	0.85		22	5.4	179	39000	1.30	
	48	31.4	3720	1.15			5.9	166	35800	1.40	
	53	28.1	3360	1.25	T 97Y180M-4		6.7	146	31300	1.60	T 187Y200L2-6
	59	25.8	2980	1.40	TF 97Y180M-4		7.5	129	28100	1.80	TH 187Y200L2-6
	65	22.8	2700	1.55	TA 97Y180M-4		8.6	114	24400	2.00	
	77	18.4	2290	1.85	TAF 97Y180M-4	22	8.1	179	25800	1.95	
	88	16.5	2000	2.10			8.9	166	23700	2.10	T 187Y180L-4
	106	14.2	1670	2.50			10	146	20700	2.40	TH 187Y180L-4
18.5	122	12.7	1450	2.60		22	11	129	18600	2.40	
	59	26.0	3000	0.85			11	137	19400	1.65	
	65	22.3	2700	0.85			13	111	15700	2.00	T 167Y180L-4
	75	20.2	2340	1.00	T 87Y180M-4		17	87.1	12600	2.25	TH 167Y180L-4
	84	18.2	2100	1.05	TF 87Y180M-4		19	78.9	11200	2.60	
	101	14.3	1740	1.20	TA 87Y180M-4	22	12	126	17600	1.05	
	117	12.9	1510	1.30	TAF 87Y180M-4		15	102	14400	1.25	
	131	11.1	1350	1.10			16	90.9	13100	1.35	
	147	9.36	1210	1.25			18	77.5	11400	1.55	T 157Y180L-4
	177	8.23	1000	1.40			21	70.1	10100	1.80	TF 157Y180L-4
22	203	7.24	870	1.50			24	63.8	8750	2.10	TA 157Y180L-4
	3.2	454	54000	0.85			27	53.9	7790	2.30	TAF 157Y180L-4
	4.1	355	47000	1.05	T 187D107Y180L-4		31	46.2	6710	2.40	
	5.6	261	34500	1.45	TH187D107Y180L-4		39	38.9	5450	3.00	
	6.6	221	29300	1.70							
	7.6	193	25600	1.95							
	8.9	163	21600	2.30							

选型参数表
Select type parameter table

功率	输出转速	速比	输出扭矩	使用系数	型号	功率	输出转速	速比	输出扭矩	使用系数	型号
P _m	n _a		M _a			P _m	n _a		M _a		
KW	r/min		Nm	fB		KW	r/min		Nm	fB	
22	16	86.1	12900	0.95		30	5.6	261	47000	1.05	
	18	77.0	11800	1.00			6.6	221	39800	1.25	T 187D107Y200L-4
	21	69.2	10200	1.20			7.6	193	34800	1.45	TH187D107Y200L-4
	23	60.3	8980	1.35			9.0	163	29400	1.70	
	27	53.7	7750	1.55	T 127Y180L-4	30	6.9	213	34470	0.85	
	31	46.8	6860	1.75	TF 127Y180L-4		7.1	206	33300	0.85	T 167D107Y200L-4
	36	40.7	5760	2.10	TA 127Y180L-4		8.1	180	32400	1.00	TH167D107Y200L-4
	40	36.1	5200	2.30	TAF 127Y180L-4		9.2	160	28700	1.10	
	47	32.3	4500	2.70			11	135	24400	1.30	
	53	29.0	3970	3.00			12	118	21300	1.50	
	61	24.7	3430	3.50		30	8.2	179	35100	1.45	
	69	20.8	3030	4.00			8.9	166	32200	1.55	
22	26	59.4	8200	0.90			10	146	28200	1.75	T 187Y200L-4
	29	50.4	7160	1.00			11	129	25300	2.00	TH187Y200L-4
	35	42.7	6070	1.20			13	114	21900	2.30	
	40	35.4	5310	1.35			14	102	19900	2.25	
	45	31.5	4690	1.55			17	88.8	17200	2.60	
	47	29.8	4490	1.50	T 107Y180L-4	30	13	111	21400	1.50	T 167Y200L-4
	51	29.3	4160	1.75	TF 107Y180L-4		17	87.1	17100	1.85	TF 167Y200L-4
	56	26.6	3770	1.90	TA 107Y180L-4		19	78.9	15200	2.10	TA 167Y200L-4
	65	22.3	3240	2.20	TAF 107Y180L-4		22	65.9	13300	2.35	TAF167Y200L-4
	74	20.6	2830	2.50			24	61.3	11800	2.40	
	88	17.4	2400	2.90		30	15	102	19500	0.90	
	100	15.5	2100	3.20			16	90.9	17900	1.00	
	109	13.0	1930	2.20			18	77.5	15500	1.15	T 157Y200L-4
	125	11.6	1680	2.60			18	77.5	15500	1.15	T 157Y200L-4
	147	9.82	1430	2.90			21	70.1	13700	1.30	TF 157Y200L-4
22	169	8.83	1250	3.10			24	63.8	11900	1.50	TA 157Y200L-4
	48	31.4	4100	0.95			27	53.9	10600	1.70	TAF157Y200L-4
	53	28.1	4000	1.05		30	31	46.2	9120	1.95	
	59	25.8	3550	1.20	T 97Y180L-4		39	38.9	7410	2.40	
	65	22.8	3210	1.30	TF 97Y180L-4		47	31.7	6100	3.00	
	77	18.4	2720	1.55	TA 97Y180L-4	30	21	69.2	13800	0.85	
	88	16.5	2370	1.75	TAF 97Y180L-4		23	60.3	12200	1.00	
	106	14.2	1990	2.10			27	53.7	10500	1.15	T 127Y200L-4
	122	12.7	1720	2.20			31	46.8	9320	1.30	TF 127Y200L-4
	141	10.3	1490	1.90			37	40.7	7830	1.55	TA 127Y200L-4
	168	8.44	1250	2.10			41	36.1	7060	1.70	TAF127Y200L-4
22	75	20.2	2790	0.80		30	47	32.3	6110	1.95	
	84	18.2	2500	0.90			53	29.0	5390	2.20	
	101	14.3	2070	1.00	T 87Y180L-4		62	24.7	4660	2.60	
	117	12.9	1800	1.10	TF 87Y180L-4		35	42.7	8250	0.85	
	131	11.1	1600	0.95	TA 87Y180L-4		40	35.4	7210	1.00	T 107Y200L-4
	147	9.36	1430	1.05	TAF 87Y180L-4	30	47	29.8	6100	1.10	TF 107Y200L-4
	177	8.23	1190	1.20			51	29.3	5650	1.25	TA 107Y200L-4
	203	7.24	1030	1.25			56	26.6	5130	1.40	TAF107Y200L-4
							65	22.3	4410	1.65	

选型参数表
Select type parameter table

功率	输出转速	速比	输出扭矩	使用系数	型号	功率	输出转速	速比	输出扭矩	使用系数	型号
P _m	n _a	i	M _a			P _m	n _a	i	M _a		
KW	r/min		Nm	fB		KW	r/min		Nm	fB	
30	74	20.6	3850	1.85		37	23	60.3	13500	0.85	T 127Y225S-4
	88	17.4	3260	2.20			27	53.7	13000	0.90	TF 127Y225S-4
	100	15.5	2850	2.40	T 107Y200L-4		31	46.8	11500	1.05	TA 127Y225S-4
	109	13.0	2620	1.65	TF 107Y200L-4		37	40.7	9660	1.25	TAF127Y225S-4
	125	11.6	2280	1.90	TA 107Y200L-4	37	41	36.1	8710	1.40	
	148	9.82	1940	2.10	TAF107Y200L-4		47	32.3	7540	1.60	
	169	8.83	1690	2.30			53	29.0	6650	1.80	
30	59	25.8	4400	0.85			62	24.7	5740	2.10	T 127Y225S-4
	66	22.8	4360	0.95			70	20.8	5080	2.30	TF 127Y225S-4
	78	18.4	3690	1.15	T 97Y200L-4		83	18.1	4270	2.70	TA 127Y225S-4
	89	16.5	3230	1.30	TF 97Y200L-4		102	15.2	3450	3.10	TAF127Y225S-4
	106	14.2	2700	1.55	TA 97Y200L-4		115	13.6	3070	2.50	
	123	12.7	2340	1.65	TAF 97Y200L-4		137	10.6	2580	2.90	
	141	10.3	2030	1.40			169	8.51	2090	3.10	
37	169	8.44	1700	1.55		37	40	40.1	8890	0.80	
	5.6	261	52200	0.85			47	29.8	7520	0.90	
	6.6	221	49200	1.00	T 187D107Y225S-4		51	29.3	6970	1.05	
	7.6	193	43000	1.15	TH187D107Y225S-4		56	25.9	6320	1.15	T 107Y225S-4
37	9.0	163	36300	1.40			65	23.3	5440	1.30	TF 107Y225S-4
	8.1	180	36000	0.80			74	20.6	4740	1.50	TA 107Y225S-4
	9.2	160	31950	0.90	T 167D107Y225S-4		88	17.4	4020	1.70	TAF107Y225S-4
	11	135	30100	1.05	TH167D107Y225S-4		100	15.5	3520	1.90	
37	12	118	26300	1.20			109	13.7	3230	1.35	
	8.2	179	43200	1.15			125	11.6	2820	1.55	
	8.9	166	39700	1.25			148	9.82	2390	1.70	
	10	146	34800	1.45	T 187Y225S-4		169	8.83	2090	1.85	
37	11	129	31200	1.60		45	6.6	221	53820	0.85	
	13	114	27100	1.85	TH187Y225S-4		7.6	193	47070	0.95	T 187D107Y225M-4
	14	102	24600	2.00			9.0	163	44200	1.15	TH187D107Y225M-4
	17	88.8	21200	2.40		45	11	135	32940	0.85	T 167D107Y225M-4
37	13	111	26400	1.20			12	118	32000	1.00	TH167D107Y225M-4
	17	87.1	21100	1.50		45	8.2	179	47340	0.95	
	19	78.9	18800	1.70	T 167Y225S-4		8.9	166	48300	1.05	
	22	65.9	16400	1.95	TH167Y225S-4		10	146	42300	1.20	
	24	61.3	14600	2.20			11	129	37900	1.30	T 187Y225M-4
	28	52.0	12400	2.30			13	114	32900	1.50	TH187Y225M-4
	16	90.9	22000	0.80			14	102	29900	1.65	
	18	77.5	19200	0.95			17	88.8	25700	1.95	
37	21	70.1	16900	1.05	T 157Y225S-4		20	71.6	21600	2.30	
	24	63.8	14700	1.25	TF 157Y225S-4	45	13	111	32100	1.00	
	27	53.9	13000	1.40	TA 157Y225S-4		17	87.1	25700	1.25	
	31	46.2	11200	1.60	TAF157Y225S-4		19	78.9	22800	1.40	
	39	38.9	9140	1.95			22	65.9	19900	1.60	T 167Y225M-4
	47	31.7	7520	2.40			24	61.3	17800	1.80	TH167Y225M-4
							28	52.0	15100	2.10	
							34	41.0	12500	2.25	

选型参数表
Select type parameter table

功率	输出转速	速比	输出扭矩	使用系数	型号	功率	输出转速	速比	输出扭矩	使用系数	型号
P _m	n _a	i	M _a			P _m	n _a	i	M _a		
KW	r/min		Nm	fB		KW	r/min		Nm	fB	
45	21	70.1	19000	0.85		55	24	63.8	20000	0.85	
	24	63.8	17800	1.00			27	53.9	17500	0.95	
	27	53.9	15900	1.15			32	46.2	16700	1.10	
	31	46.2	13700	1.30	T 157Y225M-4		39	38.9	13500	1.35	T 157Y250M-4
	39	38.9	11100	1.60	TF 157Y225M-4		47	31.7	11100	1.60	TF 157Y250M-4
	47	31.7	9150	1.95	TA 157Y225M-4		53	28.9	9840	1.85	TA 157Y250M-4
	53	28.9	8080	2.20	TAF157Y225M-4		62	24.4	8530	2.10	TAF157Y250M-4
	61	24.4	7000	2.30			69	21.8	7590	2.40	
	69	21.8	6230	2.60			80	18.5	6540	2.50	
	80	18.5	5370	3.10			99	15.1	5310	3.10	
45	31	46.8	13000	0.85		55	117	13.7	4510	3.50	
	37	40.7	11700	1.00			37	40.7	13000	0.85	
	41	36.1	10600	1.15			47	32.3	11200	1.05	
	47	32.3	9170	1.30	T 127Y225M-4		53	29.0	9850	1.20	
	53	29.0	8090	1.50	TF 127Y225M-4		62	24.7	8510	1.40	T 127Y250M-4
	62	24.7	6990	1.70	TA 127Y225M-4		70	20.8	7530	1.60	TF 127Y250M-4
	70	20.8	6180	1.95	TAF127Y225M-4		83	18.1	6330	1.90	TA 127Y250M-4
	83	18.1	5190	2.30			103	15.2	5110	2.20	TAF127Y250M-4
	102	15.2	4190	2.70			115	13.6	4550	1.75	
	115	13.6	3740	2.10		75	137	10.6	3830	1.95	
45	137	10.6	3140	2.30			170	8.51	3090	2.30	
	169	8.51	2540	2.50			11	129	56520	0.80	
	51	29.8	8480	0.85			13	114	49050	0.90	
	56	26.6	7690	0.95			14	102	49400	1.00	
	65	22.3	6610	1.10			17	88.8	42600	1.15	T 187Y280S-4
	74	20.6	5770	1.25	T 107Y225M-4		20	71.6	35800	1.40	TH187Y280S-4
	88	17.4	4890	1.40	TF 107Y225M-4		23	62.0	31000	1.60	
	100	15.5	4280	1.55	TA 107Y225M-4		28	54.8	25800	1.95	
	109	13.0	3930	1.10	TAF107Y225M-4		33	48.5	22000	2.30	
	125	11.6	3430	1.25		75	19	78.9	34020	0.85	
55	148	9.82	2910	1.40			22	65.9	29610	0.95	
	169	8.83	2540	1.55			24	61.3	29400	1.10	
	10	146	46350	0.95			29	52.0	25100	1.30	T 167Y280S-4
	11	129	46200	1.10			35	41.0	20800	1.55	TH167Y280S-4
	13	114	40100	1.25			40	36.9	17700	1.80	
	14	102	36400	1.35	T 187Y250M-4		46	31.9	15600	2.00	
	17	88.8	31300	1.60	TH187Y250M-4		51	28.8	13900	2.30	
	20	71.6	26300	1.90			60	25.2	11900	2.40	
	23	62.0	22800	2.20		75	39	38.9	18400	1.00	
	17	87.1	31300	1.00			47	31.7	15100	1.20	
55	19	78.9	27800	1.15			54	28.9	13400	1.35	T 157Y280S-4
	22	65.9	24200	1.30	T 167Y250M-4		62	24.4	11600	1.55	TF 157Y280S-4
	24	61.3	21600	1.50	TH167Y250M-4		69	21.8	10300	1.75	TA 157Y280S-4
	28	52.0	18400	1.75			81	18.5	8890	2.00	TAF 157Y280S-4
	34	41.0	15300	2.10			99	15.1	7220	2.50	
	40	36.9	13000	2.25			117	13.7	6120	2.80	

选型参数表
Select type parameter table

功率 P _m KW	输出转速 n _a r/min	速比	输出扭矩 M _a Nm	使用系数 f _B	型号	功率 P _m KW	输出转速 n _a r/min	速比	输出扭矩 M _a Nm	使用系数 f _B	型号
75	47	32.3	14000	0.85		110	17	88.8	56070	0.80	
	53	29.0	13400	0.90			20	71.6	47070	0.95	
	62	24.7	11600	1.05			23	62.0	45300	1.10	
	70	20.8	10200	1.15	T 127Y280S-4		28	54.8	37700	1.30	
	83	18.1	8600	1.40	TF 127Y280S-4		33	48.5	32200	1.55	T 187Y315S-4
	103	15.2	6940	1.65	TA 127Y280S-4		35	43.3	30100	1.65	TH187Y315S-4
	116	13.6	6190	1.30	TAF 127Y280S-4		39	37.2	27300	1.85	
	138	10.6	5200	1.45			45	32.4	23500	2.10	
	171	8.51	4200	1.65			53	28.7	19800	2.25	
90	14	102	53370	0.85		110	29	52.0	32940	0.85	
	17	88.8	51100	1.00			35	41.0	30300	1.05	
	20	71.6	42900	1.15			41	36.9	25900	1.25	
	23	62.0	37200	1.35	T 187Y280M-4		46	31.9	22800	1.40	T 167Y315S-4
	28	54.8	31000	1.60	TH187Y280M-4		52	28.8	20400	1.55	TH167Y315S-4
	33	48.5	26400	1.90			61	25.2	17300	1.85	
	35	43.3	24700	2.00			73	20.5	14400	2.20	
	38	37.2	22400	2.20			86	17.1	12300	2.30	
90	22	65.9	35550	0.80		110	62	24.4	16900	1.05	T 157Y315S-4
	24	61.3	31770	0.90			70	21.8	15100	1.20	TF 157Y315S-4
	29	52.0	30100	1.05			81	18.5	13000	1.40	TA 157Y315S-4
	35	41.0	24900	1.30			100	15.1	10600	1.70	TAF157Y315S-4
	40	36.9	21300	1.50	T 167Y280M-4		117	13.7	8950	1.90	
	46	31.9	18700	1.70	TH167Y280M-4	132	20	71.6	56520	0.80	
	51	28.8	16700	1.90			23	62.0	48960	0.90	
	60	25.2	14200	2.20			28	54.8	45300	1.10	
	73	20.5	11800	2.40			33	48.5	38600	1.30	
	85	17.1	10100	2.90			35	43.3	36100	1.40	T 187Y315M-4
90	39	38.9	20000	0.80			39	37.2	32700	1.55	TH187Y315M-4
	47	31.7	18200	1.00			45	32.4	28200	1.75	
	54	28.9	16000	1.10	T 157Y280M-4		53	28.7	23700	2.10	
	62	24.4	13900	1.30	TF 157Y280M-4		61	25.6	20500	2.30	
	69	21.8	12400	1.45	TA 157Y280M-4		74	22.3	17100	2.30	
	81	18.5	10700	1.70	TAF157Y280M-4		86	18.0	14600	2.50	
	99	15.1	8670	2.10		132	35	41.0	32760	0.90	
	117	13.7	7350	2.30			41	36.9	31100	1.05	
90	62	24.7	12500	0.85			46	31.9	27400	1.15	T 167Y315M-4
	70	20.8	12300	1.00	T 127Y280M-4		52	28.8	24400	1.30	TH167Y315M-4
	83	18.1	10300	1.15	TF 127Y280M-4		61	25.2	20800	1.55	
	103	15.2	8330	1.40	TA 127Y280M-4		73	20.5	17200	1.85	
	116	13.6	7420	1.10	TAF127Y280M-4		86	17.1	14700	2.20	
	138	10.6	6240	1.20		132	62	24.4	18300	0.90	T 157Y315L2-4
	171	8.51	5040	1.40			70	21.8	18100	1.00	TF 157Y315L2-4
							81	18.5	15600	1.15	TA 157Y315L2-4
							100	15.1	12700	1.40	TAF157Y315L2-4
							117	13.7	10700	1.60	

选型参数表
Select type parameter table



功率 P _m KW	输出转速 n _a r/min	速比	输出扭矩 M _a Nm	使用系数 f _B	型号	功率 P _m KW	输出转速 n _a r/min	速比	输出扭矩 M _a Nm	使用系数 f _B	型号
160	28	54.8	49410	0.90		160	41	36.9	33930	0.85	
	33	48.5	46800	1.05			61	25.2	25200	1.25	T 167Y315L1-4
	45	32.4	34200	1.45	T 187Y315L1-4		73	20.5	20900	1.55	TH167Y315L1-4
	53	28.7	28700	1.75	TH187Y315L1-4		86	17.1	17800	1.80	
	61	25.6	24900	1.90		160	81	18.5	18900	0.95	T 157Y315L1-4
	74	22.3	20700	2.10			100	15.1	15400	1.15	TF 157Y315L1-4
	86	18.0	17700	2.30			117	13.7	13000	1.30	TA 157Y315L1-4
160	41	36.9	33930	0.85		200	33	48.5	52650	0.85	
	61	25.2	25200	1.25	T 167Y315L1-4		45	32.4	42700	1.15	T 187Y315L2-4
	73	20.5	20900	1.55	TH167Y315L1-4		53	28.7	35900	1.40	TH187Y315L2-4
	86	17.1	17800	1.80			61	25.6	31100	1.55	
							74	22.3	25900	1.70	
160	81	18.5	18900	0.95	T 157Y315L1-4	200	86	18.0	22100	1.85	
	100	15.1	15400	1.15	TF 157Y315L1-4		61	25.2	31500	1.00	T 167Y315L2-4
	117	13.7	13000	1.30	TAF 157Y315L1-4		73	20.5	26100	1.20	TH167Y315L2-4
							86	17.1	22300	1.45	
200	33	48.5	52650	0.85		200	100	15.1	19200	0.95	T 157Y315L2-4
	45	32.4	42700	1.15	T 187Y315L2-4		TF 157Y315L2-4				
	53	28.7	35900	1.40	TH187Y315L2-4		117	13.7	16300	1.05	TA 157Y315L2-4
											TAF 157Y315L2-4

TA37-TA107轴装(空心轴)

TA37-TA107 Shaft mounting(hollow shaft)

T 系列外形安装尺寸

T series outline and mounting dimension

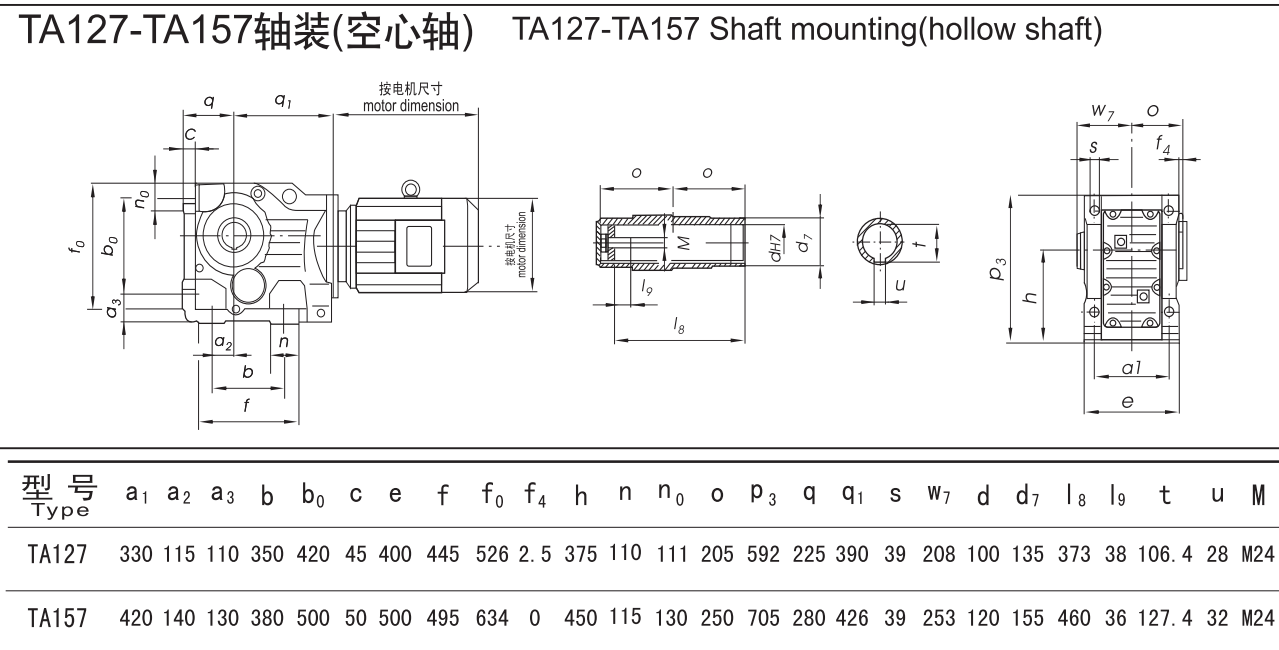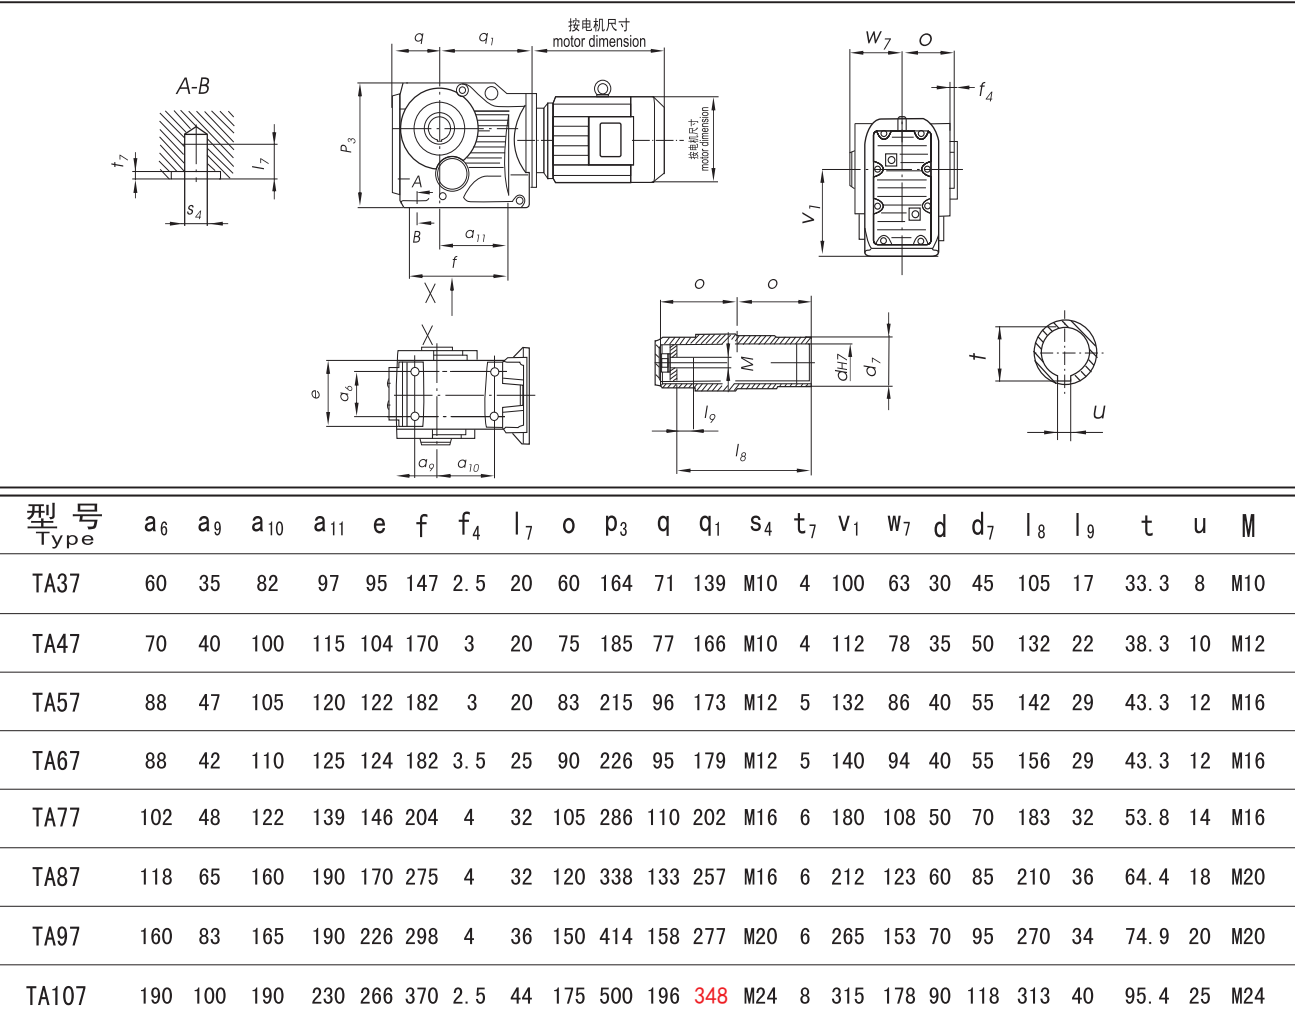


TA37D17-TA107D87轴装


TA37D17-TA107D87 Shaft mounting

T系列双级外形安装尺寸

T series double stages outline and mounting dimension

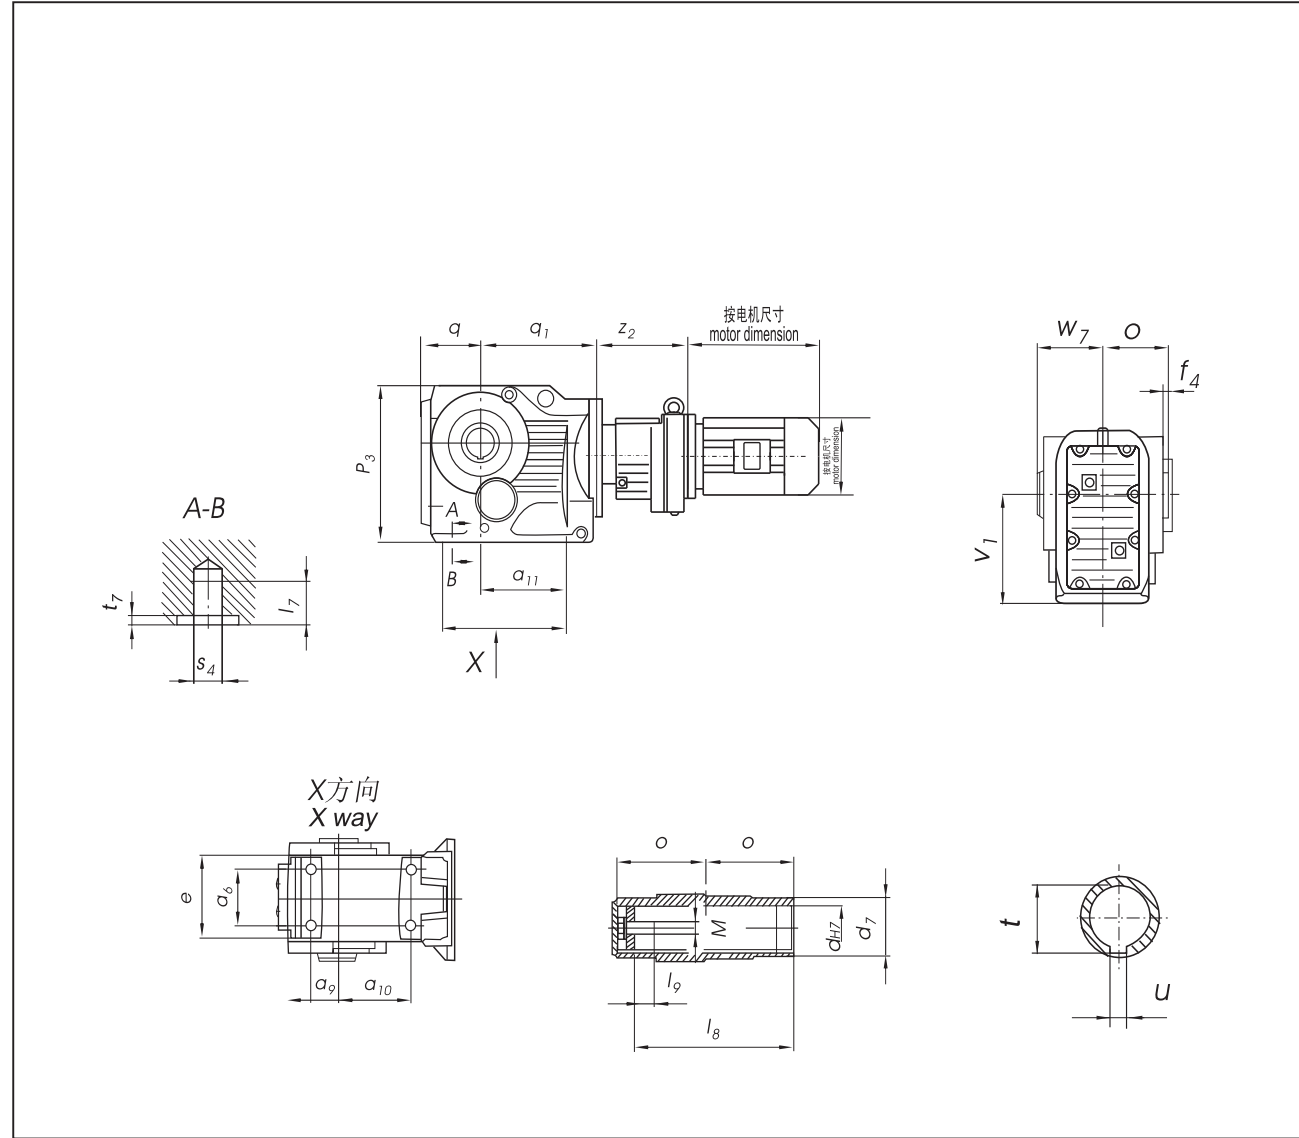


TA127D77-TA157D107轴装 TA127D77-TA157D107 Shaft mounting(hollow shaft)
T 系列双级外形安装尺寸 T series double stages outline and mounting dimension

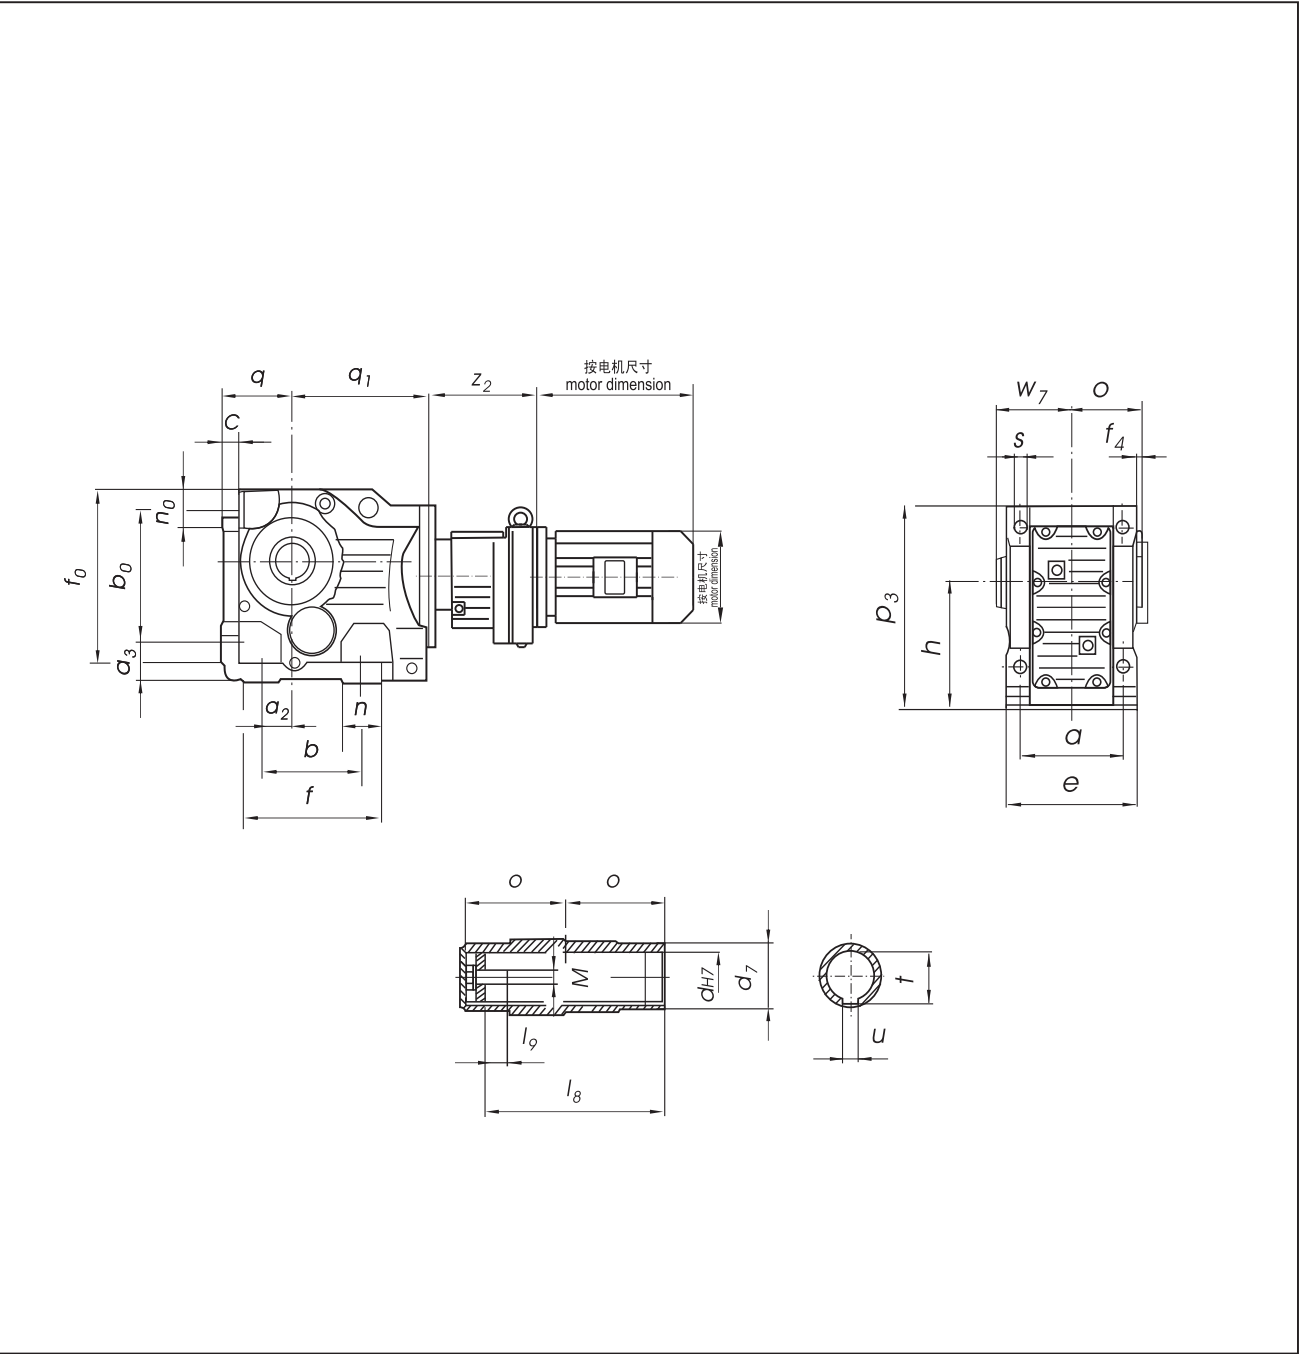

型号 Type	a	a ₂	a ₃	b	b ₀	c	e	f	f ₀	f ₄	h	n	n ₀	o	p ₃	q	q ₁	s	w ₇	z ₂	d	d ₇	l ₈	l ₉	t	u	M
TA127D77	330	115	110	350	420	45	400	445	526	2.5	375	110	111	205	592	225	390	39	208	232	100	135	373	38	106.4	28	M24
TA127D87	330	115	110	350	420	45	400	445	526	2.5	375	110	111	205	592	225	390	39	208	280	100	135	373	38	106.4	28	M24
TA157D97	420	140	130	380	500	50	500	495	634	0	450	115	130	250	705	280	426	39	253	325	120	155	460	36	127.4	32	M24
TA157D107	420	140	130	380	500	50	500	495	634	0	450	115	130	250	705	280	426	39	253	382	120	155	460	36	127.4	32	M24


TA/T37-TA/T157
反力矩支撑环
Shaft mounted with torque arm

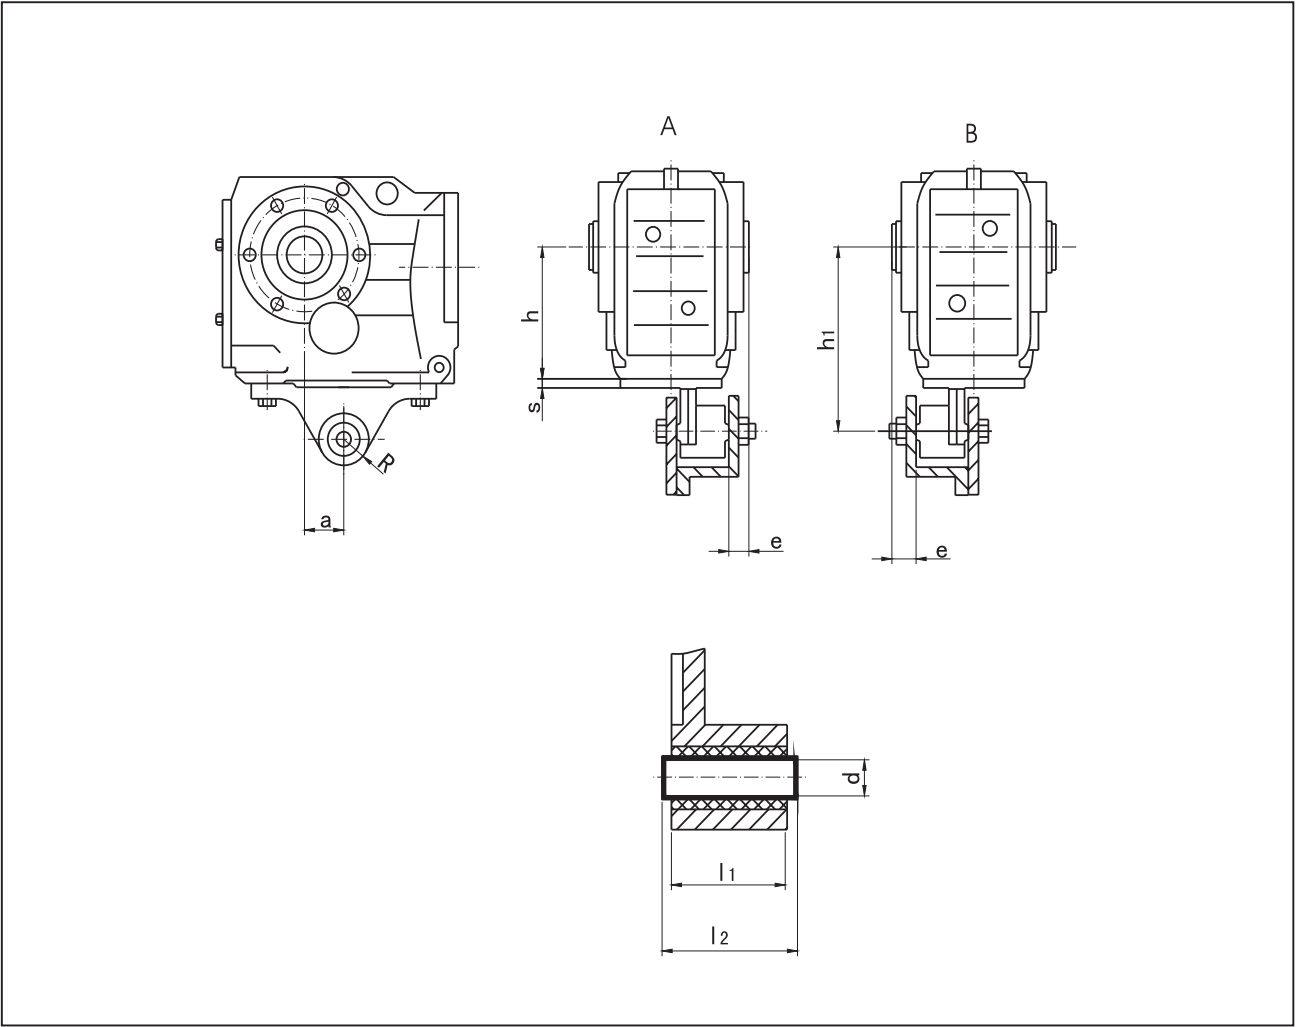

型号 Type	a	R	h	s	e	h ₁	d	l ₁	l ₂
TA/T37	23.5	22.5	100	10	20	140	10.4±0.1	31	36-0.3
TA/T47	30	22.5	112	12	20	160	10.4±0.1	31	36-0.3
TA/T57	40	29	132	13	18	192	16.4±0.1	54	60-0.3
TA/T67	45	29	140	13	25	200	16.4±0.1	54	60-0.3
TA/T77	52.5	29	180	14	25	250	16.4±0.08	54	60-0.3
TA/T87	60	41	212	16	30	300	25±0.08	72	80-0.3
TA/T97	70	41	265	17	40	350	25±0.08	92	100-0.3
TA/T107	74	41	315	20	45	450	25±0.08	92	100-0.3
TA/T127	60	70	375	45	7	550	40±0.08	110	126-0.3
TA/T157	50	70	450	45	2	700	40±0.08	110	126-0.3


TF37-TF107法兰安装
T 系列外形安装尺寸

TF37-TF107 Flange mounting
T series outline and mounting dimension

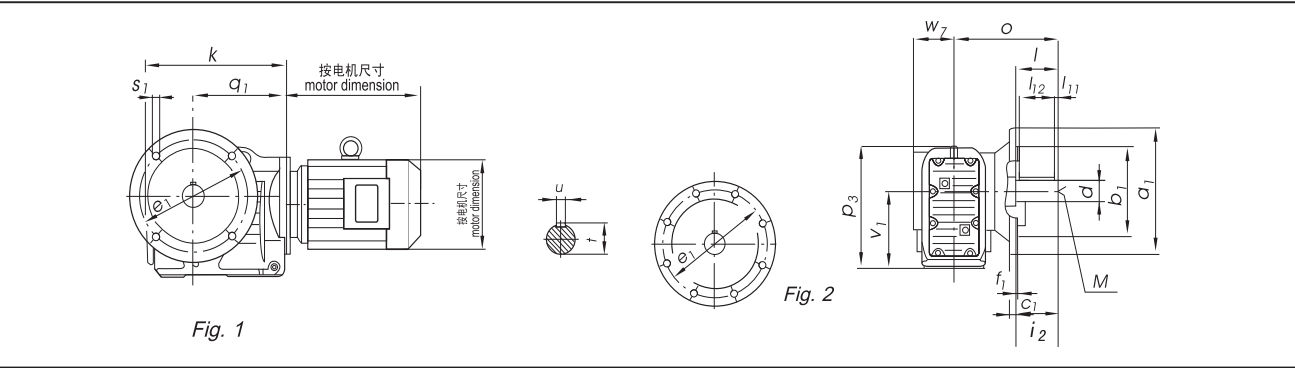

型号 Type	a ₁	Fig	b ₁	c ₁	e ₁	f ₁	i ₂	k	o	p ₃	q ₁	s ₁	v ₁	w ₇	d	l	l ₁₁	l ₁₂	t	u	M
TF37	160	1	110	10	130	3.5	50	210	134	164	139	9	100	57.5	25	50	5	40	28	8	M10
TF47	200	1	130	10	165	3.5	60	243	160	185	162	11	112	72	30	60	3.5	50	33	8	M10
TF57	250	1	180	15	215	4	70	269	177	215	173	13.5	132	80	35	70	7	56	38	10	M12
TF67	250	1	180	15	215	4	80	273	193	226	179	13.5	140	86.5	40	80	5	70	43	12	M16
TF77	300	1	230	16	265	4	100	311	242	286	202	13.5	180	101	50	100	10	80	53.5	14	M16
TF87	350	1	250	18	300	5	120	389	270	338	257	17.5	212	138	60	120	5	110	64	18	M20
TF97	450	2	350	22	400	5	140	435	332	414	277	17.5	265	171	70	140	7.5	125	74.5	20	M20
TF107	450	2	350	22	400	5	170	537	386	500	348	17.5	315	175	90	170	5	160	95	25	M24

TF127-TF157法兰安装
TF127-TF157 Flange mounting

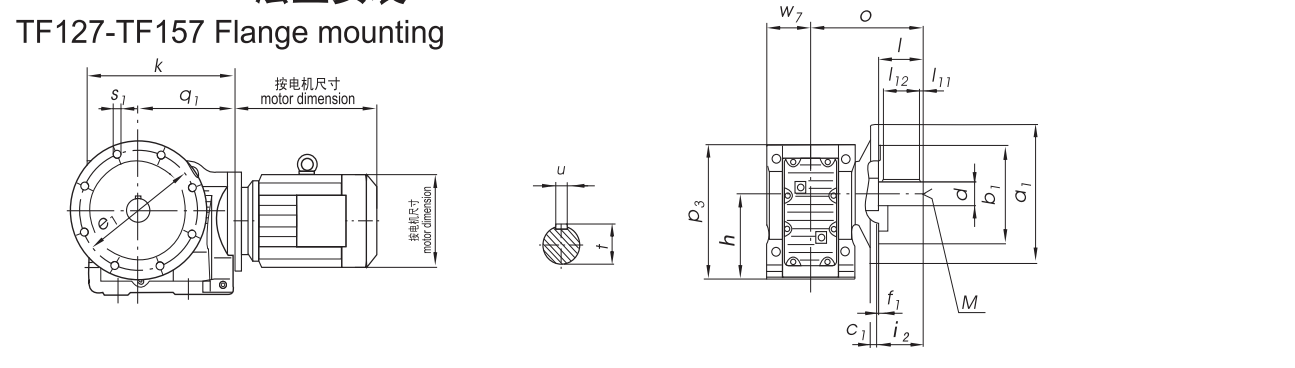


型号 Type	a ₁	b ₁	c ₁	e ₁	f ₁	h	i ₂	k	o	p ₃	q ₁	s ₁	w ₇	d	l	l ₁₁	l ₁₂	t	u	M
TF127	550	450	25	500	5	375	210	615	466	592	390	17.5	203	110	210	15	180	116	28	M24
TF157	660	550	28	600	6	450	210	706	520	705	426	22	250	120	210	5	200	127	32	M24

注: d≤50mm公差是k6, d>50mm公差是m6
b1≤230mm公差是j6, b1>230mm公差是h6

Note: d≤50mm Tolerance k6, d>50mm Tolerance m6
b1≤230mm Tolerance j6, b1>230mm Toerance h6

T37-T157底脚安装
T 系列外形安装尺寸

T37-T157 Foot mounting
T series outline and mounting dimension

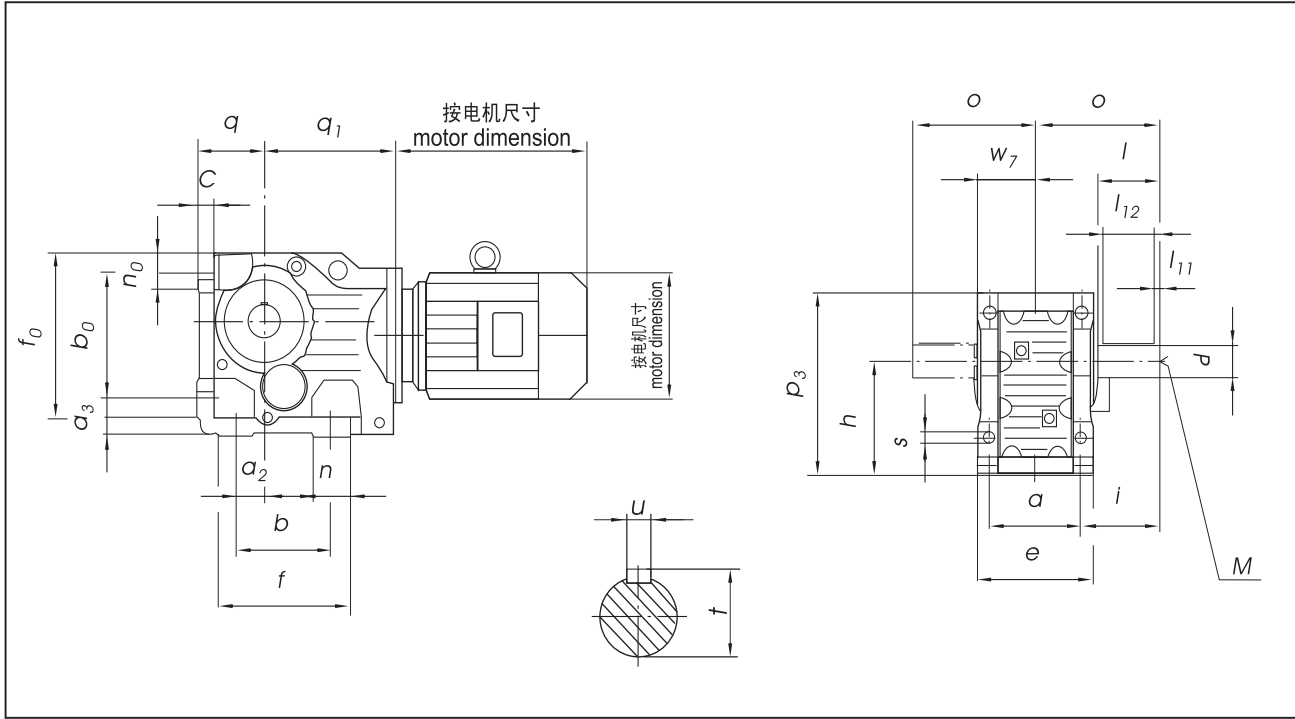

型号 Type	a	a ₂	a ₃	b	b ₀	c	e	f	f ₀	h	i	n	n ₀	o	p ₃	q	q ₁	s	w ₇	d	l	l ₁₁	l ₁₂	t	u	M
T37	100	28	32	110	115	16	120	143	150	100	60	38	36	110	164	63	139	11	60	25	50	5	40	28	8	M10
T47	120	35	37	130	130	18	145	162	170	112	75	35	37	135	185	71	166	11	72.5	30	60	3.5	50	33	8	M10
T57	130	30	45	130	150	21	157	172	190	132	88	40	43	153	217	80	173	13.5	80	35	70	7	56	38	10	M12
T67	140	30	45	120	160	24	170	170	203	140	101	55	43	171	228	90	179	13.5	86.5	40	80	5	70	43	12	M16
T77	165	40	55	150	200	27	200	208	263	180	123.5	55	55	206	288	112	202	17.5	101	50	100	10	80	53.5	14	M16
T87	180	55	70	180	233	32	230	260	305	212	150	75	67	240	340	132	257	22	116	60	120	5	110	64	18	M20
T97	240	75	75	240	295	36	290	294	372	265	171	60	82	291	417	160	277	26	146	70	140	7.5	125	74.5	20	M20
T107	270	95	95	280	360	40	340	380	448	315	212	100	98	347	503	200	348	33	175	90	170	5	160	95	25	M24
T127	330	115	110	350	420	45	400	445	526	375	253	110	111	418	592	225	390	39	203	110	210	15	180	116	28	M24
T157	420	140	130	380	500	50	500	495	634	450	247	115	130	457	705	280	426	39	250	120	210	5	200	127	32	M24

注: d≤50mm公差是k6, d>50mm公差是m6


Note: d≤50mm Tolerance k6, d>50mm Tolerance m6

T37D17-T157D107底脚安装

T37D17-T157D107 Foot mounting

T系列双级外形安装尺寸

T series double stages outline and mounting dimension

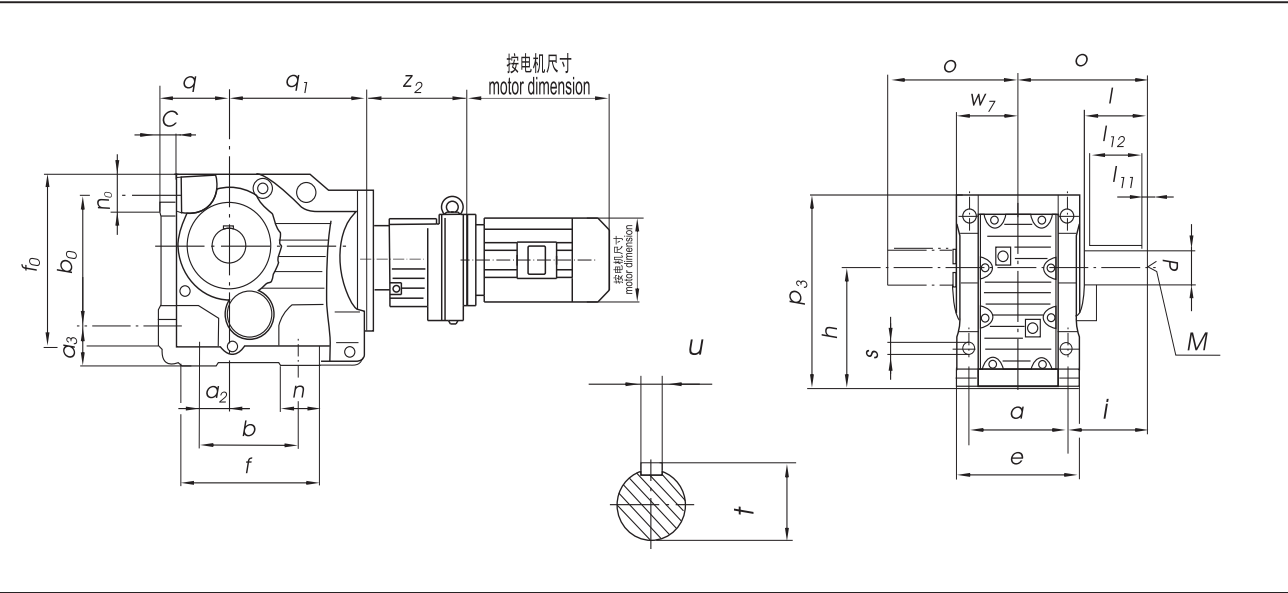

型号 Type	a	a ₂	a ₃	b	b ₀	c	e	f	f ₀	h	i	n	n ₀	o	p ₃	q	q ₁	s	w ₇	z ₂	d	l	l ₁₁	l ₁₂	t	u	M
T37D17	100	28	32	110	115	16	120	143	150	100	60	38	36	110	164	63	139	11	60	175	25	50	5	40	28	8	M10
T47D37	120	35	37	130	130	18	145	162	170	112	75	35	37	135	185	71	166	11	72	165	30	60	3.5	50	33	8	M10
T57D37	130	30	45	130	150	21	157	172	190	132	88	40	43	153	217	80	173	13.5	80	165	35	70	7	56	38	10	M12
T67D37	140	30	45	120	160	24	170	170	203	140	101	55	43	171	228	90	179	13.5	86.5	165	40	80	5	70	43	12	M16
T77D37	165	40	55	150	200	27	200	208	263	180	123.5	55	55	206	288	112	202	17.5	101	165	50	100	10	80	53.5	14	M16
T87D57	180	55	70	180	233	32	230	260	305	212	150	75	67	240	340	132	257	22	116	190	60	120	5	110	64	18	M20
T97D57	240	75	75	240	295	36	290	294	372	265	171	60	82	291	417	160	277	26	146	190	70	140	7.5	125	74.5	20	M20
T107D77	270	95	95	280	360	40	340	380	448	315	212	100	98	347	503	200	348	33	175	232	90	170	5	160	95	25	M24
T127D77	330	115	110	350	420	45	400	445	526	375	253	110	111	418	592	225	390	39	203	232	110	210	15	180	116	28	M24
T127D87	330	115	110	350	420	45	400	445	526	375	253	110	111	418	592	225	390	39	203	280	110	210	15	180	116	28	M24
T157D97	420	140	130	380	500	50	500	495	634	450	247	115	130	457	705	280	426	39	250	325	120	210	5	200	127	32	M24
T157D107	420	140	130	380	500	50	500	495	634	450	247	115	130	457	705	280	426	39	250	382	120	210	5	200	127	32	M24

注：d≤50mm公差是k6, d>50mm公差是m6


Note: d≤50mm Tolerance k6,d>50mm Tolerance m6

TAF37-TAF157空心轴法兰安装

TAF37-TAF157 Hollow shaft and flange mounting

T系列外形安装尺寸

T series outline and mounting dimension

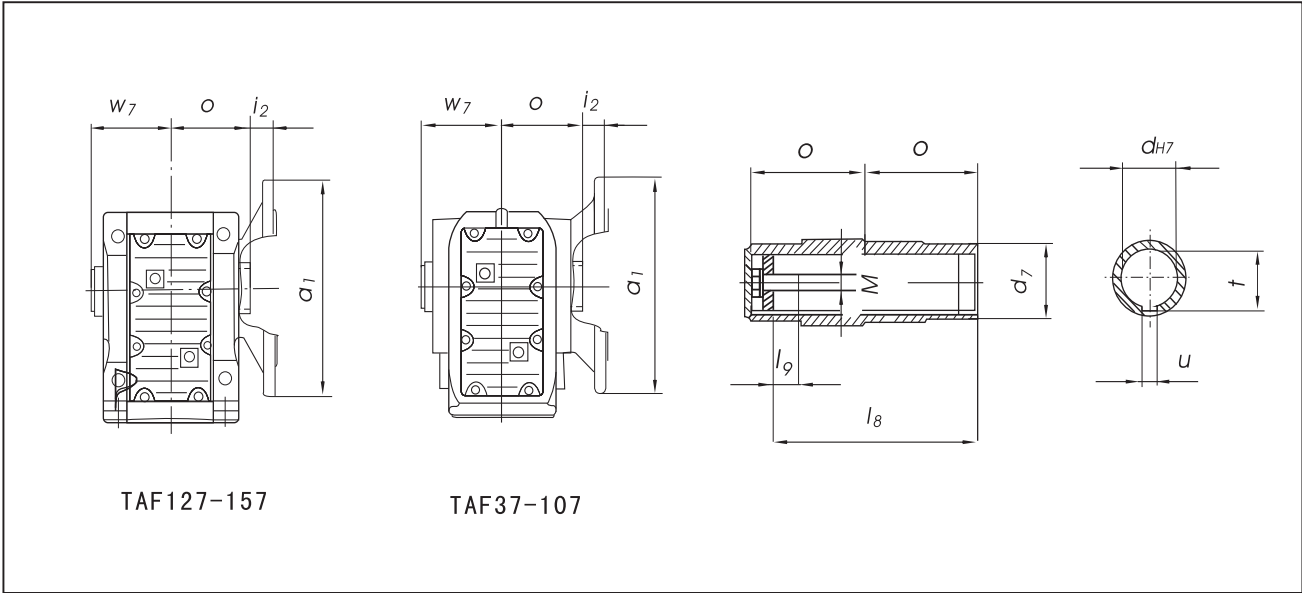


型号 Type	a ₁	d	d ₇	i ₂	l ₈	l ₉	o	w ₇	t	u	M
TAF37	160	30	45	24	105	17	60	63	33.3	8	M10
TAF47	200	35	50	25	132	22	75	78	38.3	10	M12
TAF57	250	40	55	23.5	142	29	83	86	43.3	12	M16
TAF67	250	40	55	23	156	29	90	94	43.3	12	M16
TAF77	300	50	70	37	183	32	105	108	53.8	14	M16
TAF87	350	60	85	30	210	36	120	123	64.4	18	M20
TAF97	450	70	95	41.5	270	34	150	153	74.9	20	M20
TAF107	450	90	118	41	313	40	175	178	95.4	25	M24
TAF127	550	100	135	51	373	38	205	208	106.4	28	M24
TAF157	660	120	155	60	460	36	250	253	127.4	32	M24

TF37D17-TF157D107法兰安装

TF37D17-TF157D107 Flange mounting

T系列双级外形安装尺寸

T series double stages outline and mounting dimension

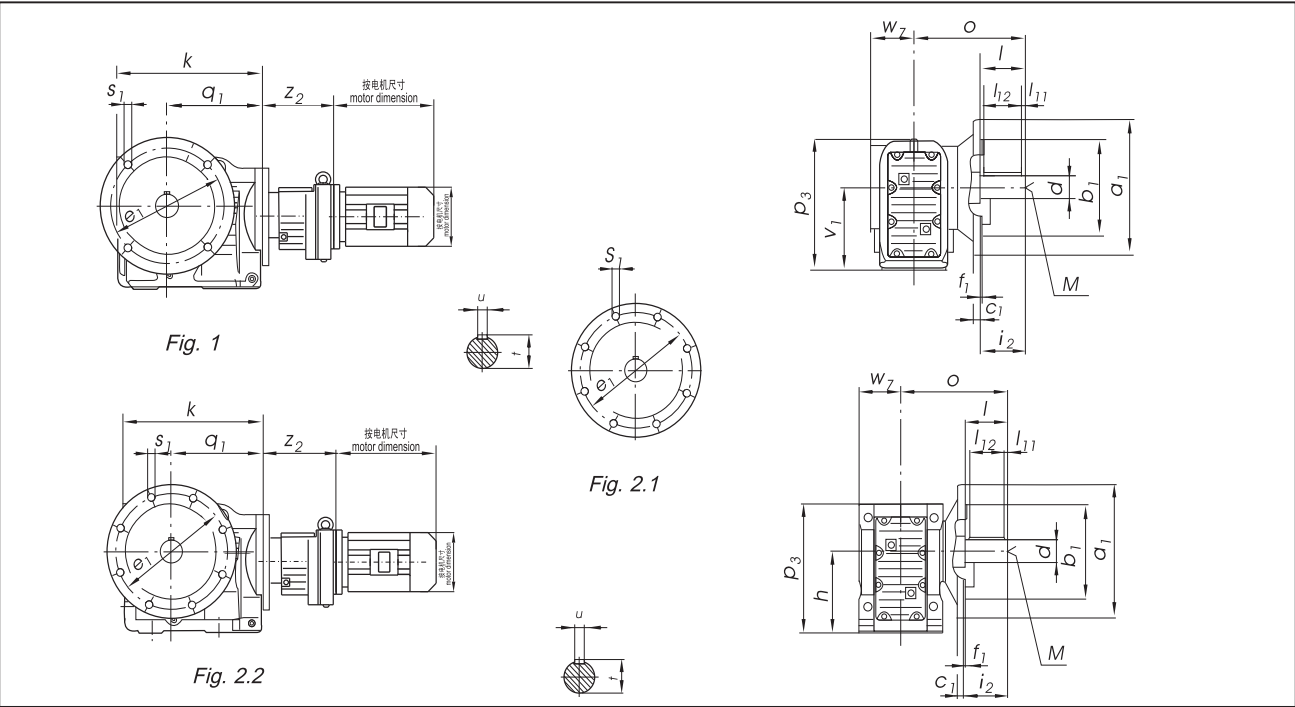

型号 Type	a ₁	Fig	b ₁	c ₁	e ₁	f ₁	i ₂	k	o	p ₃	q ₁	s ₁	v ₁	h	w ₇	z ₂	d	l	l ₁₁	l ₁₂	t	u	M
TF37D17	160	1	110	10	130	3.5	50	210	134	164	139	9	100	-	57.5	175	25	50	5	40	28	8	M10
TF47D37	200	1	130	10	165	3.5	60	243	160	185	166	11	112	-	72	165	30	60	3.5	50	33	8	M10
TF57D37	250	1	180	15	215	4	70	269	177	215	173	13.5	132	-	80	165	35	70	7	56	38	10	M12
TF67D37	250	1	180	15	215	4	80	273	193	226	179	13.5	140	-	86.5	165	40	80	5	70	43	12	M16
TF77D37	300	1	230	16	265	4	100	311	242	286	202	13.5	180	-	101	165	50	100	10	80	53.5	14	M16
TF87D57	350	1	250	18	300	5	120	389	270	338	257	17.5	212	-	138	190	60	120	5	110	64	18	M20
TF97D57	450	2.1	350	22	400	5	140	435	332	414	277	17.5	265	-	171	190	70	140	7.5	125	74.5	20	M20
TF107D77	450	2.1	350	22	400	5	170	537	386	500	348	17.5	315	-	175	232	90	170	5	160	95	25	M24
TF127D77	550	2.2	450	25	500	5	210	615	466	592	390	17.5	-	375	203	232	110	210	15	180	116	28	M24
TF127D87	550	2.2	450	25	500	5	210	615	466	592	390	17.5	-	375	203	280	110	210	15	180	116	28	M24
TF157D97	660	2.2	550	28	600	6	210	706	520	705	426	22	-	450	250	325	120	210	5	200	127	32	M24
TF157D107	660	2.2	550	28	600	6	210	706	520	705	426	22	-	450	250	382	120	210	5	200	127	32	M24

注: d≤50mm公差是k6, d>50mm公差是m6
b1≤230mm公差是j6, b1>230mm公差是h6


Note: d≤50mm Tolerance k6, d>50mm Tolerance m6
b1≤230mm Tolerance j6, b1>230mm Tolerance h6

T..S37-T..S157底脚安装

T..S37-T..S157 Foot mounting

T 系列外形安装尺寸(无电机输入轴)

T series outline and mounting dimension(omit input shaft of motor)

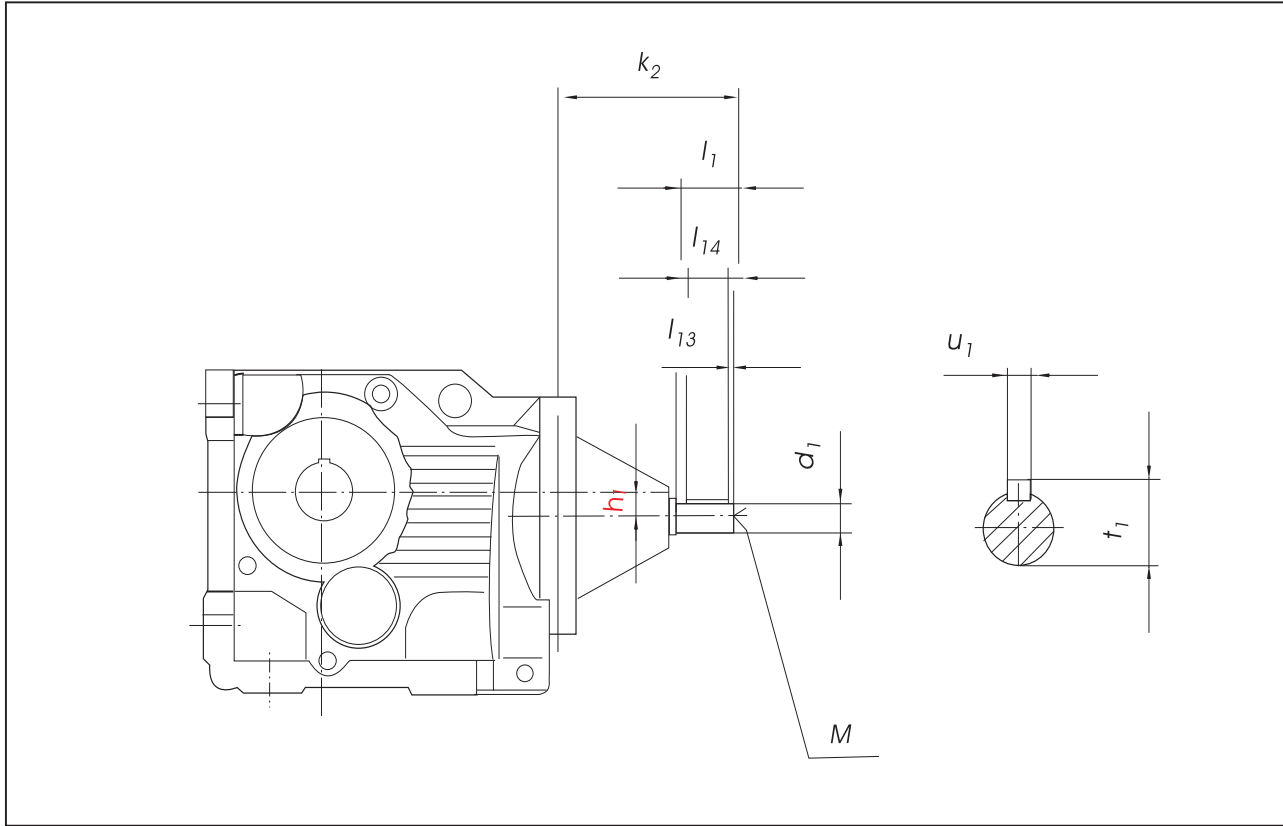


型号 Type	d ₁	k ₂	l ₁	l ₁₃	l ₁₄	t ₁	u ₁	h ₁	M
T..S37	16	115	40	4	32	18	5	9	M5
T..S47	19	120	40	4	32	21.5	6	10	M6
T..S67	19	120	40	4	32	21.5	6	20	M6
T..S77	24	140	50	5	40	27	8	28	M8
T..S87	28	180	60	5	50	31	8	22.5	M10
T..S97	38	220	80	5	70	41	10	34.5	M12
T..S107	42	270	110	10	70	45	12	52	M16
T..S127	55	297	110	10	90	59	16	57	M20
T..S157	70	374	140	15	110	74.5	20	78.7	M20

注: TA、TAF、TF型无电机输入轴按照此图外形尺寸。
d₁≤50mm公差是k6, d₁>50mm公差是m6

Note: TA、TAF、TF Type omit input shaft of motor; refer to this chart outline and mounting dimension.
d₁≤50mm Tolerance k6, d₁>50mm Tolerance m6


T..S167-T..S187底脚安装 T..S167-T..S187 Foot mounting
T系列外形安装尺寸 (无电机输入轴) T series outline and mounting dimension(Omit input shaft of motor)

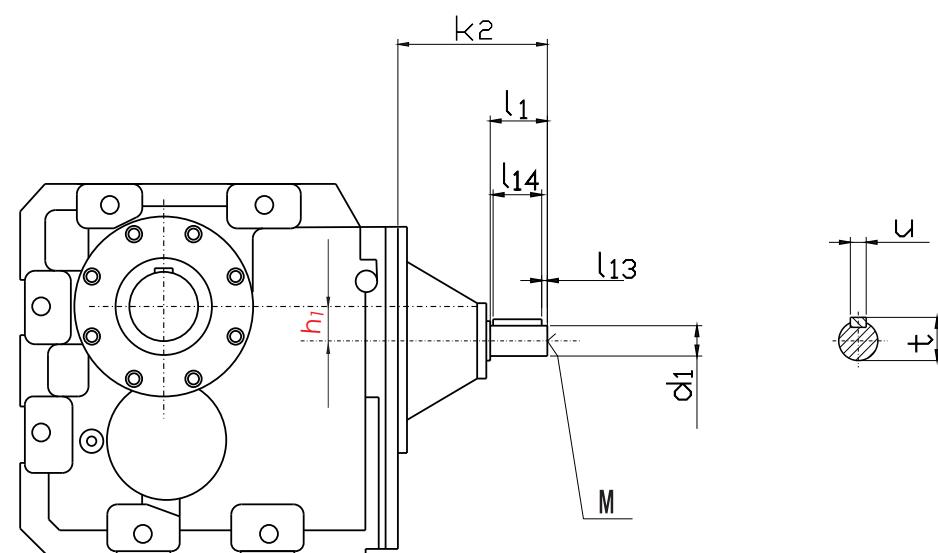

型号 Type	d ₁	k ₂	l ₁	l ₁₃	l ₁₄	t	u	h ₁	M
T..S167	70	374	140	15	110	74.5	20	100	M20
T..S187	70	374	140	15	110	74.5	20	112	M20

注：TA、TAF、TF型无电机输入轴按照此图外形尺寸。
Note: TA、TAF、TF Type omit input shaft of motor;rerer to this chart outline and mounting dimension.


T167-T187底脚安装 T167-T187 Foot mounting
T 系列外形安装尺寸 T series outline and mounting dimension

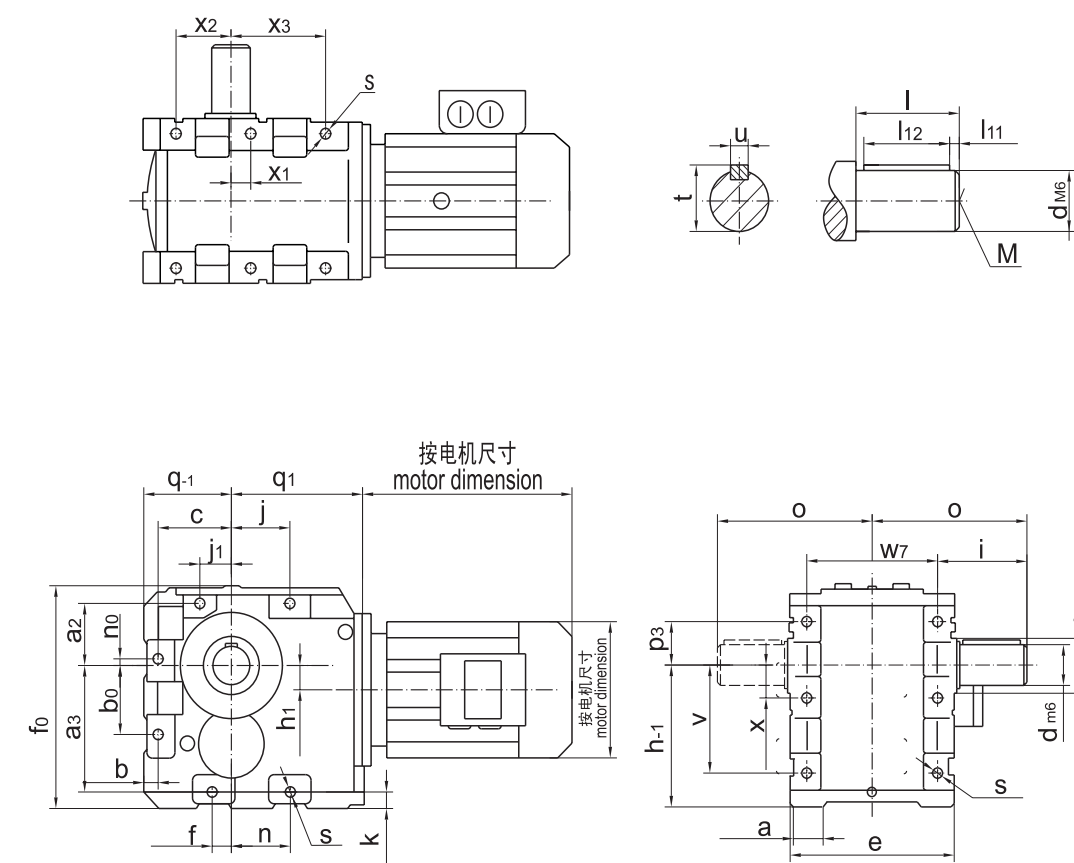

型 号 Type	a a ₂	k	a ₃	b b ₀	v	c	e	f f ₀	s	x x ₁	i	n n ₀	o	x ₂ x ₃	p ₃	q q ₁	j	h h ₁	w ₇	j ₁	l l ₁₂	l ₁₁	d d ₁	t	u	M
T167	104 220	50	450	50 250	385	265	580	70 786	33	115 70	315	210 22	555	200 340	155	315 522	210	500 100	480	115	250 220	15	160 230	169	40	M30
T187	110 250	50	550	50 305	460	305	640	60 942	39	150 95	387	250 5	657	215 405	160	355 582	250	600 112	540	135	320 300	10	190 260	200	45	M30

T167D97-T187D107底脚安装
T系列双级外形安装尺寸

T167D97 - T187D107 Foot mounting
T series double stages outline and mounting dimension

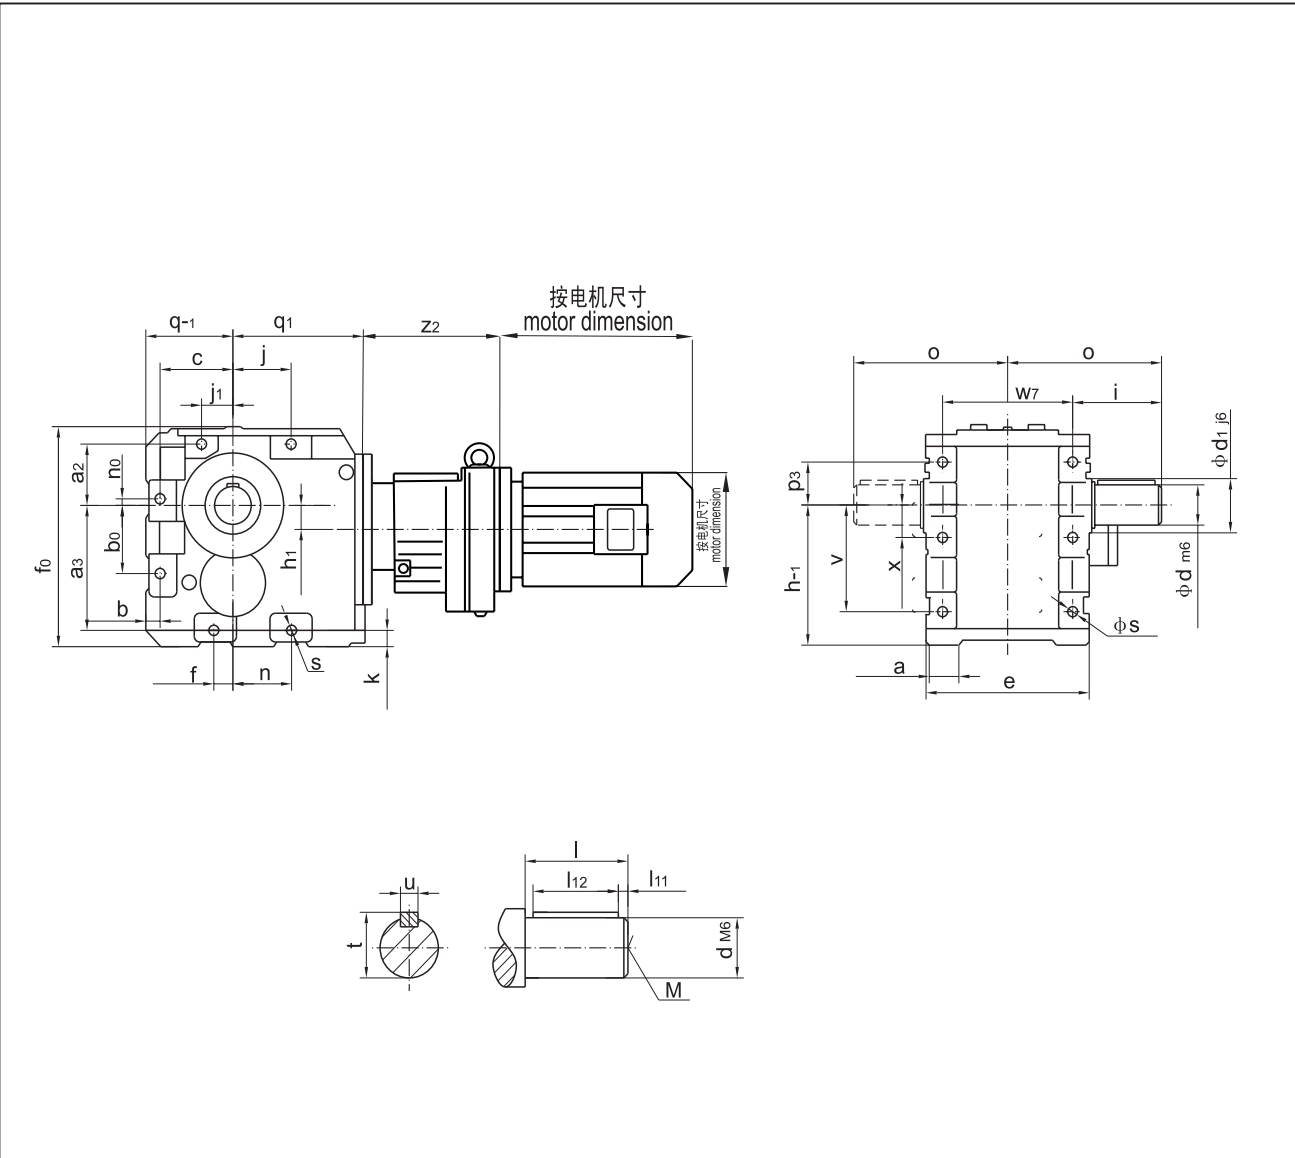

型号 Type	a a ₂	k	a ₃	b b ₀	v	c	e	f f ₀	s	x	i	n n ₀	o	z ₂	p ₃	q q ₁	j	h h ₁	w ₇	j ₁	l l ₁₂	l ₁₁	d d ₁	t	u	M
T167D97	104 220	50	450	50 250	385	265	580	70 786	33	115	315	210 22	555	325	155	315 522	210	500 100	480	115	250 220	15	160 230	169	40	M30
T167D107	104 220	50	450	50 250	385	265	580	70 786	33	115	315	210 22	555	382	155	315 522	210	500 100	480	115	250 220	15	160 230	169	40	M30
T187D97	110 250	50	550	50 305	460	305	640	60 942	39	150	387	250 5	657	325	160	355 582	250	600 112	540	135	320 300	10	190 260	200	45	M30
T187D107	110 250	50	550	50 305	460	305	640	60 942	39	150	387	250 5	657	382	160	355 582	250	600 112	540	135	320 300	10	190 260	200	45	M30

注：T167-T187详细外形安装尺寸(见130页)。
Note:T167-T187 detailed outline and mounting dimension(refer to 130 pages).



P

系列-平行轴斜齿轮减速机

